A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES,


Vos. LV14. - 10.

NEW YORK, OCTOBER 15, 1887.

\$3.00 per Year.

HARVARD OBSERVATORY AND THE HENRY DRAPER MEMORIAL.


In 1872, Professor Henry Draper first succeeded in photographing the lines of the stellar spectrum. Having secured this triumph for America, he pursued his researches in the same direction until his death in 1882. His skill and ingenuity were alike remarkable. He was not one of those observers who, leaving details to others, try merely to do the final operations. He possessed the quality of thoroughness, and personally attended even to the mechanical details of his investigations. He ground his own specula. It is not too much to say that the work done by him derives a character of value and reliability from the attention to detail that only such an investigator could give it. His powers of handiwork, combined with his scientific standing, make him a model for astronomers. Had dry plate photography been at his service, his work would have taken a far wider range. But using wet plates, that can only bear comparatively short exposures, he was at an immense disadvantage. One interesting feature of his labors was the scientific fellowship of his wife. It is said that he rarely went to his observatory without her. Hence it was with peculiar grace that Mrs. Draper became the found-

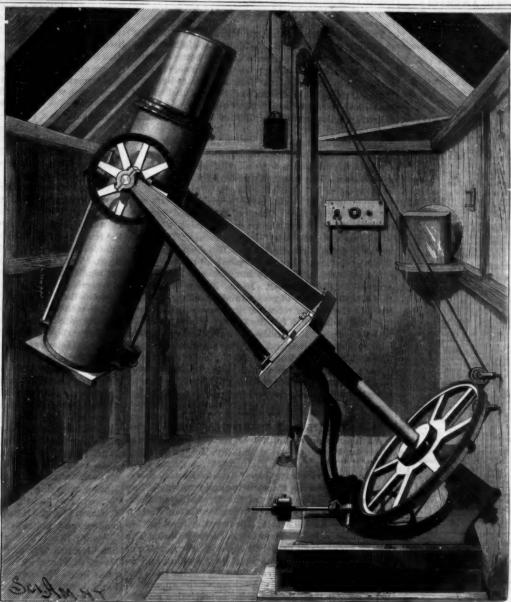

EIGHT INCH PHOTOGRAPHIC TELESCOPE.

er of the Henry Draper memorial. From funds of her providing, the expense of continuing Dr. Draper's sadly interrupted labors is sustained. No more fitting and useful memorial of the great scientist than this can be thought of. Besides this, Mrs. Draper continues to take a personal interest in the work as done. Apparatus formerly belonging to and constructed by Dr. Draper is soon to be added to the working appliances of the observatory by her liberality. Photographs of the spectra are sent her, and she maintains a vivid interest, because an intelligent one, in the re-

The different buildings containing the instruments and laboratories of the Harvard College observatory are situated in Cambridge, at quite a distance from the college whose name they bear. They are scattered over the crown of a grassy hill. On entering the grounds, the first building seen is the residence of the director, Prof. Edward C. Pickering. Directly in the rear of this is the old Harvard College observatory, with its equatorial and its 15 in. telescope, a German instrument, in its day one of the great telescopes of the country, now relegated to the background by the triumphs of Alvan Clark and his sons. Back and to the side of these are what now (Continued on page 247.)

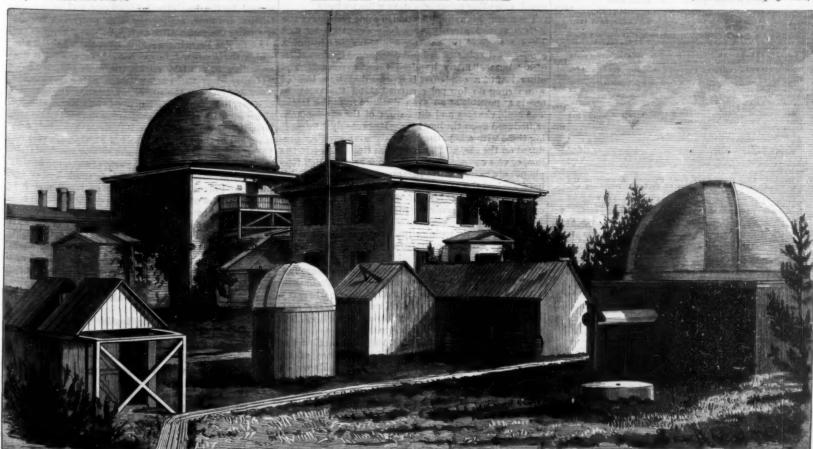

GENERAL VIEW OF THE HARVARD OBSERVATORY.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors. PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN.

A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

one year, for the U. H. or Canada.... six months, for the U. H. or Canada... one year, to any foreign country beion sy postal or express money order. ging to Postal Union, 4 00

Asstralia and New Zealand.—Those who desire to receive the ENTIFIC AMERICAN, for a little over one year, may remit £1 in current lunial bank notes. Address MUNN & CO., 351 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement distinct paper from the SCIENTIPIC AMERICAN, THE SUPPLEMENT must weekly. Every number contains is octavo pages, uniform in size h SCIENTIPIC AMERICAN. Terms of subscription for SUPPLEMENT, Us year, for U. S. and Canada. \$6.00 a year to foreign countries belong-to the Potal Union. Single copies, is cents. Sell by all newsdealers

ting to the rosted order.

Throughout the country.

Comblierd Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT
Will be sent for one year, to any address in U.S. or Camada, on receipt of
spread deficers.

The safest way to remit is by draft, postal order, express money order, or

Anstralia and New Zealand.—The SCIENTIFIC AMERICAN and opplement will be sent for a little over one year on receipt of £3 cur-

me MUNN & CO., 351 Broadway, corner of Franklin Street, New York

Scientific American Export Edition.

the SCIENTIFIC AMERICAN Export Edition is a large and splendid perical, issued once a month. Bach number contains about one hundred
e quarto pages, profusely illustrated, embracing: (3) Most of the plates
pages of the four preceding weekly issues of the SCIENTIFIC AMERICi. with its splendid engravings and valuable information. (3) Comcial, trade, and manufacturing announcements of leading houses,
ms for Export Edition. 85.02 a year, ent prepaid to any part of the
d. Single copies. Scients. Eff. Manufactures and there who desire
encouncing published in this edition at a very moderate cost.

Tress MUNA & CO., 351 Brondway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, OCTOBER 15, 1887.

Contents.

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT No. 615

For the Week Ending October 15, 1887.

Price 10 cents. Por sale by all newedcalers.

ANTHROPOLOGY.—The Ba-Vansi.—Vivid description of this tribe of African savages.—Their human sacrifices.—The tombs of their chiefs.—The general customs.—3 illustrations.

II. BOTANT.—A Plant Heliostat.—By BYRON D. HALSTED.—A Californian plant whose leaves always turn toward the sun.—Investigation of this curious habit.

Renanthera Lowi.—An interesting and beautiful flowering plant illustrated.—I illustration.

BriginkEtting.—A New Arrangement of Hydraulic Main.—Leclaire's new main with Alavoine's strainers.—A new laveation in Larce and Small Locomotives.—A thirty-nine and a three ton locomotive compared.—Their relative dimensions and gauges.—3 lustrations
Petroleum Fuel.—The problem of burning petroleum on locomoves.—Experience with it in Russia and on the Pennsylvania road

the contry with the manufacture of Steam and the Pennsylvania road The Comparative Value of Steam and Hot Water for Transmit-ing Heat and Power.—A paper read by CHARLES E. EMERY be-re the Am. Soc. Mech. Engineers.—An elaborate discussion of

The uniform subject.

Which was a subject.

Mill. NAVAL ENGINEEMENG.—New Floating Dock.—A new lish dry dock described and illustrated; its arrangements for taking on "listed" vestels.—I illustrations.

Ship Waves.—Report of an important lecture.—By Bir WHALAM THOMSON, recently delivered in Edinburgh; the forms and motions of waves.—Situatations.

LX. ORDNANCE.—The New One Hundred and Ten Ten Gun.—The dimensions and sections of the great Elswick gun, the largest of the William Armstrong's productions.—Illustrations.

Paralle Chioride, Bremide, and

PHOTOGRAPHY. On Red and Purple Chloride, Br Iodide of Silver. On heliochromy and on the latent phinage. By M. CARRY L.B., Philadelphia. First install

Iodide of Silver.—Os, heliochro image.—By M. Caury Laa, Ph famous papers by this leading | Practical Photography.—A | LONDE, of France.—5 illustration the above subject by A

XI. Pil'Yalca.—Experiments on the Mecon a Large Scale.—By E A. Cowyrs: is has association paper giving account tes, and results attained.—3 illustratic The Velocity of Propagation of Fig. A.c. M. inot. C. E.—Interesting any drassed to the subject of the safet

RAILROAD MEN'S BUILDING.

The new Railroad Men's Building, erected in this eity by Mr. Cornelius Vanderbilt, at a cost of \$100,000, as a gift to railroad employes, was formally opened on October 3, 1887, when it was turned over to the uses of the Railroad Branch of the Young Men's Christian Association. Speeches were made by the donor, Mr. Vanderbilt, and by several others. Then they were responded to in an address of acceptance by Mr. Elbert B. Monroe in behalf of the association to whom the building is specially dedicated. Bishop Potter was present, and created somewhat of a sensation by proposing three cheers for Mr. Vanderbilt. Mr. Chauncey Depew closed the proceedings by one of his characteristic addresse

The building is situated on Madison Avenue near the Grand Central Depot. Within it contains all the appurtenances of a well-ordered club house-lecture room, bath rooms, reading room, lunch room, etc. Entertainments by prominent lecturers are to be given there throughout the season, and there is little doubt that much pleasure and profit will be derived by the railroad employes from this gift of the railroad mag-

The building is to be accessible to all employes of roads using the Grand Central Depot. It is not exclusively in the possession of the Young Men's Christian Association. This point was made by Mr. Vanderbilt in his speech.

The building, of ornate style in brick and terra cotta, is two stories high. The roof is of glazed Spanish Akron tiles. The gymnasium and bowling alley are fitted up with the latest improvements. The bath rooms include a plunge bath, 6 feet deep and 91/2 by 131/4 feet in area. In the basement all the partitions are of marble, with bronze framework. Brass pipes are used for the plumbing. In the library is a collection of 6,400 volumes of general and miscellaneous reading. In the reading room 100 newspapers are kept on file. The lecture hall is 36 by 66 feet in area, and can seat 400 people. It is finished in oak, cherry, and ash. The building is wired and piped for electricity and gas. The architects were Robertson & Potter, of this city.

For a nominal charge any of the railroad employes on the specified lines has full use of the privileges, and after being in good standing for a year becomes a life member.

EXHIBITION OF TRAIN TELEGRAPHY.

An interesting exhibition of train telegraphy was given by the Consolidated Railway Telegraph Company, of this city on the 6th instant. A special train of six cars was run from Jersey City to Easton, carrying the apparatus for transmitting and receiving. The train contained the guests of the Consolidated Company, and the party was the outcome of an invitation extended by Mr. Charles A. Cheever, the president of the company, to the New York Electric Club. The trip occupied about five hours. During the running of the train, the operator was kept busy sending and receiving messages. Although the speed of the train has no relation to the practical working of the apparatus, yet a greater measure of public appreciation may be looked for from the fact that the cars ran at very high speed, exceeding sometimes sixty miles an hour.

The method is a simplification in some respects of the Edison system, already very fully described by us.* The tin roofs of the cars are utilized as one leaf of a condenser that is charged and discharged by the action of a "buzzer" many hundred times a second. The other leaf of a condenser is represented by a line of wire strung on low poles carried along the track as nearly as possible at an even distance from the track. The rapid charges and discharges of the car roof are reproduced upon the line wire. By properly interrupting these with a key, the Morse signals are either produced on the car, and by induction transmitted to the line, or vice versa. For receiver, one or two Bell telephones are used. These the operator attaches to his head against the ear, so as to have both hands free. He then establishes himself upon one of the regular car seats, requiring only the room of a single passenger.

The ease of connecting the car apparatus with the car is noticeable By spring clips proper connections are rapidly made by the operator upon being assigned to any particular car.

A clip is sprung upon the car truck to secure ground; from this a wire leads to the instruments. another wire is carried to the roof of the car, where it is also secured by a spring clip. Two or more car roofs possess. are thus connected to obtain increased surface. The

car connections are the acme of simplicity. The apparatus consists of the "buzzer," transmitting key, and induction coil. The core of the latter is the magnet of the "buzzer." These are secured to a small lap board. For battery, twelve chromic acid cells (Bunsen type) are used. A compact form of these has been adopted, and is carried in a hand case. The whole equipment for a car is carried by one man, the operator himself, and can be attached and put in working order and transmit messages or receive them in a few minutes.

* See Scientific American, Vol. 54, No. 8.

The great advance over the old Edison method consists in the use of a single line wire instead of a number of parallel lines. The reduction of the quantity of apparatus and its portability are also notable.

Many well-known scientists and electricians were on the train; among others, Thos. A. Edison, Prof. Barker, Messrs. Pope, Gillilland, Phelps, Van der Weyde, and others. The opportunity was taken for sending and receiving many congratulatory messages.

MAGAZINE RIFLES.

The merits and defects of the various types of magazine guns are just now attracting much attention in the European military press. L'Avenir Militaire makes serious charges against the efficiency of the German magazine gun, with which the German infantry have been supplied, and the Militar Wochenblatt replies with similar charges against the French arm. The one charge and the other do not differ essentially; neither the German soldier, with the new "Mauser," nor the Frenchman with the "Lebel," have yet got the "hang" of the magazine rifle, which, being far more complicated than the old arm, requires more careful handling. That novices at such mechanisms should be awkward is scarcely surprising, and the observer at the butts, however friendly, would see little to praise in their target practice. That skill as well as experience is required to get the real value of the magazine gun bas been clearly demonstrated during the last few months; and an excellent proof that the new arm is not altogether satisfactory is to be found in the German and French military journals, which, while indignantly denying the truth of the assertions made by hostile critics, seem unable to bring forward any facts or figures to aid them. Thus the Deutsche Heeres Zeitung, just at present much wrought up over the published observations of a correspondent of the Swiss journal Gazette Suisse, contents itself with denying in general terms the truth of his statements, and makes no attempt to go specifically into the charges. It says that the new arm has been shown, beyond peradventure, to be at least quite as efficient as any other type known; that it is simple in construction, strong in parts, accurate in fire, and in the hands of the German soldier, accustomed to handling the old Zundnadelgewehr, of which this is only an improvement, is more effective than any other. Yet the Swiss correspondent, who witnessed the work of a part of the 25th corps at the butts, only corroborates other military observers when he declares that men draughted from the farming districts of Bavaria, Wurtemburg, and especially the Pomeranians, Westphalians, and West Prussians, cannot, because of the great size of their fingers, operate the mechanism of the Mauser magazine gun with nicety, dispatch, or safety to the parts; and that in such unskillful hands the advantages of a quick-firing gun are lost and its defects made more prominent.

Again, like others who have observed raw levies handling this type of gun, he says that the "extractor lever" (the lever which throws out the empty shell and rams home the new cartridge), which is worked by hand, is easily broken, and that the men cut their fingers upon the sharp edges of the mechanism. The continual change in the center of gravity of the piece, caused by the loss of weight at one end as the cartridges are fired, makes the aim uncertain, because changing the range after each fire.

As to the French magazine rifle, the "Lebel," with which the French infantry have been armed, it has, according to military critics, the same defects as the "Mauser," but the French soldier being quicker and more dexterous in the use of mechanism, the equation of error in charging and firing is less, as are also the chances of breaking. The improvements in this arm recently made by Lebel and General Tramind, commandant of the military school of St. Cyr, are very important. The bore, like the arm now in use, is of eight millimeters, and the bullets, made of steel, are fired by a newly invented powder, which is smokeless, of tremendous potency, gives little or no recoil, and, it is said, the noise of the discharge is so slight that it cannot be heard at a distance of twenty-five yards. The projectile is much smaller than that now in use, as is also the cartridge, yet the trajectory is almost straight, the mark being hit at long range 95 times out of a possible 100 by those at all accustomed to arms of any kind. In some respects this new piece resembles the in its mach Pralon rifle, but are eradicated the defects which that was seen to

Recent experiences of the English with the repeating rifle have been peculiarly unsatisfactory. The Broad Arrow, quoting the Times of India, says that the exhaustive trials at Bengal have proved that both the Lee-Burton and the improved Lee are altogether unsatisfactory. It says:

'That there should be many who object to the new rifle on the grounds of the waste of ammunition involved is only natural, and to be expected, but to find the weapon itself breaking down in its strongest point, viz, rapidity of fire, is astonishing, but not incomprehensible. The report says that the improved Lee isthe better of the two, but that when any large number

of rounds have to be fired, the Martini-Henry is quicker than either. The term 'repeating rifle' is really misleading to the non-military public, and the name 'magazine rifle' is far more accurate. Many people seem to imagine that the repeating rifles fire continuously like a revolver, up to a certain number of shots, by merely pulling the trigger; but this is far from being the case. Each cartridge has to be extracted. and the breech closed as in the case of a single loader, the only time saved being that employed in taking a fresh cartridge out of the pouch and placing it in the chamber, while, when the magazine is emptied, it is necessary to refill it, cartridge by cartridge, thus wasting as much time as is occupied in loading the same number of cartridges direct into the chamber. The addition of a fixed magazine must of necessity make the rifle clumsy and awkward to handle, while it must either make the balance unequal or depend solely on a spring for its action."

How French Bread is Made.

One summer's day we stopped to call at the stone farm house of Monsieur Duval. Ernestine, the eldest daughter, was housekeeper in her dead mother's place, and she it was who brought out the amber-colored cider, the goat's cheese, and the heavy, hard, country bread. It is an essential of French peasant hospitality to offer these things to visitors.

The loaf she took from the shelf was one of half a dozen leaning against the black wall. These loaves resembled cart wheels, and had been baked in sixquart milk pans. Ernestine cut the loaf with a small saw made for the purpose! Nothing less than such a saw, or a pirate's cutlass, could sever that homely but wholesome pain rassis.

These loaves, we knew, were baked only once a month. Bread day in a Norman peasant family is like washing day on an American farm, in the respect that it comes at regular periods. We judged that bread day in this cottage was approaching, from the fact that only six loaves remained of the original thirty or there-

After our luncheon Ernestine took us through the orchard to a picturesque stone building, where the bread was wont to be made. This building had once been part of an ancient abbey, and amid its ivy-covered ruins we could still trace fine sculpture and bits of armorial designs, but inside there was no trace of art or architecture. It was really a Norman hen house. We saw several pairs of sabots or wooden shoes hanging from the wall and looking as if they had been whitewashed.

In one corner of the place was a large space inclosed with boards. This was empty, but, like the sabots, it suggested whitewash or mortar making.

Ernestine told us that this was the family dough trough. Hither, once a month, came her father and the hired man to "set" the yeast a-rising. Flour and water were stirred together with the huge wooden spades shaped like our snow shovels which hung with the sabots upon the wall. When the mass, thoroughly beaten together, had risen and assumed a dark color and leathery consistency, then came the tug of war. The two men put on the sabots over their ordinary shoes, jumped in upon the dough, and began the kneading. Their way was to hop and prance and flourish like opera dancers, to stamp and kick like horses, exerting themselves till the perspiration streamed off them and they had no strength left. After this process the dough was put into the pans, and then baked in the huge oven at the rear of the abbatial hen

In all Norman towns half-clad men may often be seen lounging about bake house doors. Their legs and feet are bare and floury, and as they tread the streets we know that they have just come from or are returning to their usual occupation of kneading bread.

'Mon Dieu!" exclaimed Ernestine when we told her that in America bread making was woman's work. Mon Dieu! how cruel your men are! I would rather shoe horses !"-Epoch.

Great Pumps.

The Lawrence Machine Company, Lawrence, Mass., have been awarded the contract for one of the largest combined capacity of 72,000 gallons per minute, 4,320,the annual inundation caused by the floods and ice gorges of the St. Lawrence River.

gradually disappear under into him, but to his from the small ones. This season a bushel of handfortunate next-door neighbor. gorges of the St. Lawrence River.

PHOTOGRAPHIC NOTES.

Instantaneous Photographs Made at Night .- With Messrs. Goedicke and Miethe, of Germany, recently and afterward subjected to a cleaning process. succeeded in producing a flash of light of surpassing brilliancy and actinic force, by mixing an explosive compound of magnesium powder, chloride of potash, and sulphide of antimony.

Experiments show this compound to be rather dangerous, requiring especial care in its handling.

Quite recently, Dr. H. G. Piffard, of this city, a memthe dangerous qualities of the potash and magnesium compounds, and finally ascertained that a similar light of great power could be easily made by mixing with seven grains of gun cotton from fourteen to twenty grains of magnesium powder. There is no danger connected with this light. The gun cotton flashes instantly, as soon as ignited, and combines with the magten feet from the object.

which was quite remarkable for the density of the other oil-producing seeds. After the first pressure the image and the detail exhibited in the dark portions of mass is broken down by hand and pressed a second the object Of course a plate of high sensitiveness had time. One hundred kilogrammes of well-ripened to be employed.

One of the Causes of the Fading of Photographs. The Photographic News finds that salts of iron in cardboard mounts have a deleterious effect on the photo-It says: Iron, in one form or another, is present in every sample of dark-colored or buff card which we have examined, and it is with respect to the darker colored cards that we have received the bulk of complaints. In the case of some of these mounts, the iron is so loosely held that water alone will extract enough to strike a blue color with ferrocyanide of potassium; but in other instances the iron is not extractable by water alone, but readily comes into solution if a portion of the mount is treated with water containing a little hydrochloric acid.

The body of the buff-colored mount is generally made, for the sake of cheapness, of a pulp containing iron, this metal usually being in an insoluble state in the case of the individual sheets of which the card is built up; but in the process of mounting these sheets, the elements necessary to produce soluble iron compounds are introduced, as the paste or cement used almost invariably contains an appreciable portion of common salt (chloride of sodium), and, if not acid when used, generally becomes so before the sheets of cardboard are dry.

In such a case, the soluble and highly mischievous perchloride of iron is formed, and either makes the prints fade all over or works through holes in the enamel coating, and produces the spotted appearance so paste, and gum for mounting the photograph become sour, the iron will be transformed into a harmful salt.

Testing for Iron.-A mount may be tested for iron in the soluble state by first making an infusion, that is, cutting up portions of the mount and soaking in warm water. If a few drops of a cyanide of potassium solution be added, a blue color should at once appear, provided any iron is present. A soluble iron compound may be considered in all cases as injurious.

To test for iron in an insoluble state, but in such a condition as to readily become soluble, pour fresh water on other pieces of the same mount, and for each drachm of water add two drops of pure hydrochloric acid, allow the whole to soak for an hour or two, and then filter off and test with ferrocyanide of potassium, as before. Iron in the condition indicated by this test may become soluble and mischievous, if the photographs are allowed to remain in a damp place, as then the paste used in making the card will probably become acid.

Very Queer Law.

If a decision just made by the Supreme Court of Connecticut is sound law, real estate on the banks of rivers with a tendency to change the course of their channels pumping plants ever planned in America. The plant is a dangerous investment for capital. The court holds is for the city of Montreal, and consists of four centri- that rivers are natural boundaries, and when they alter fugal pumps, each with a discharging opening of 24 their course their functions as boundaries are not afinches diameter, and capable of handling 18,000 gallons fected by their former relation to lands. That no misof water per minute, and four similar pumps of 15 take may be made interpreting the meaning of the nical, scientific, or domestic appliances, where a tenalons per minute. Thus the four 24 inch pumps have a possible result from the waywardness of the river. tricita. "If," the decision says, "after washing away the in-000 gallons per hour, 103,690,000 gallons, or 386,000 tons, tervening lot, it should encroach upon the remoter lots, of water per day of twenty-four hours; and the four 15 and should then begin to change its movement in the inch have a combined capacity of 28,000 gallons per other direction, gradually restoring what it had taken minute, or 1,680,000 gallons per hour. These pumps from the intervening lot, the whole, by law of accreare contracted for by the Inundation Committee of tion, would belong to the remoter, but now approxi-Montreal, and are designed to pump the sewage of mate, lot." Under this statement of the law an owner the city over the walls and dikes now in process of on the river front is not only liable to see his property erection to protect the lower portions of the city from gradually disappear under his own eyes, but if it reap-

Oil from Grape Seeds.

In Italy oil is now made from grape seed. According rapid plates of the present time, no trouble is found in to the Revue Francaise, the following is the method taking instantaneous photographs by day light, but employed. On being removed from the wine press the doing such work at night is something quite new. mare iz well dried, the seeds are separated by a fan,

When perfectly clean and well dried, they are ground like wheat. The finer the flour thus obtained the greater the yield of oil. The milling requires some attention as regards the arrangement of the millstones. As soon as the first product is withdrawn, it is bolted; that which is left on the bolting cloth is again ground, and so on, care being taken to add a little water to the flour ber of the Society of Amateur Photographers, carried as it passes between the stones. The product from the on a series of experiments with a view of overcoming mills is then thrown into boilers. If ten kilogrammes, for example, are to be treated, in the middle of the mass, and into a hole extending to the bottom of the vessel, three liters of water are poured. The vessel is then placed over a slow fire; the flour little by little is stirred with the hand or with a spatula, to mix it well and to prevent the formation of lumps, and it is left over the fire until the hand cannot bear the heat of the nesium to produce an intense actinic light. The lens is mixture. This operation is very important. The better used with full aperture, while the light is placed about regulated the cooking of the flour, the greater is the quantity of oil obtained. The flour, still hot, is placed We were shown a negative made with this light in wrappers, and is taken to the press and treated like grapes give from ten to twelve kilogrammes of oil.

Sulphurous Fumigations.

The Havre Congress of Hygiene have agreed to publish a set of directions for disinfecting, for the benefit of doctors or masters of infected vessels. Brimstone, broken up in small pieces, should be placed in broad and shallow earthenware or cast iron dishes, of about 1 liter capacity. The vessels should be of one piece, without solder, and, as a precaution against fire. should be placed in tubs holding 2 or 3 in. of water. To light the brimstone, either sprinkle it with a little alcohol or tip it with a little cotton wadding dipped in the same liquid. For each cubic meter of room, 30 grammes of sulphur are requisite, or about 1 oz. for each 40 cubic feet, all the openings being kept tightly closed for twenty-four hours. How to proceed when a large space is to be disinfected, and how to open the doors after fumigating, are described in detail, but one of the characteristic cautions given by the wise men at Havre is to avoid as much as possible, on board steamers, to let sulphur fumes get into the engine room -not that serious harm is to be apprehended, but because the vapors turn polished brass and steel an ugly red color, which greatly displeases the engineers.

The British Standing Army,

The "General Annual Return of the British Army" for the year 1886 has just been presented to Parliament. familiar to professional photographers. If the starch, On the 1st of December, 1886, the composition of the personnel of the army was as follow:

Officers	7,204
Warrant officers	687
Sergeants and farriers	12,756 N. C. O.'s and mer
Total	economic impleters

The nationalities of the non-commissioned officers and men of the army were as follows:

English	 	146,171
Scotch	 	16,446
Irish	 	32,153
Various	 	3,437

Oxychloride of Zinc Cement,

This cement or mastic is prepared by mixing 1 part of the finest pulverized glass with 3 parts of oxide of zinc thoroughly calcined (made from the carbonate), which is afterward kept in well-stoppered glass vials. Separately 1 part of borax is dissolved in the smallest possible quantity of water, it is mixed with a solution of chloride of zinc of 15-16 sp. gr., and is kept in this state in well closed vials. To use this mastic, enough of the powder is mixed with some of the liquid to form a putty, which hardens readily until like stone. Under the name of Paris dental cement a similar preparation is sold in the pharmacies which has even been used for filling hollow teeth. This composition can serve excellently for many other purposes; for example, to attach to each other different parts of techinches discharge opening, and a capacity of 7,000 gal- court, the decision gives a forcible illustration of a cious, quickly hardening cement is required.-L' Elet-

> Ax ingenious plan to save a dying pear tree was adopted in the garden of L. M. Chase, of Boston. The mice had girdled the tree so that it seemed bound to die. Mr. Chase planted four small trees around it, and close to it, cut off the tops, pointed the ends, and, making incisions in the bark of the pear, bent the small trees, and grafted them upon the dying trunk. They all lived, and that tree draws its nourishment


VALVE GEAR FOR OSCILLATING ENGINES.

We illustrate a novel and ingenious valve gear for oscillating engines devised by John William Hartley, of California Works, Stoke-on-Treut, England, and given in Engineering, from which we take the follow-

This gear does away with the necessity for the use of eccentrics and permits of the expansion being varied at will up to the latest point of cut-off for which the engine is designed. We give two engravings, one show ing the gear in perspective applied to an engine with the crankshaft above the cylinder, and the other illustrating an engine of the inverted type. The arrangements are practically identical, but some of the parts are more clearly shown in one view, and some in the other. The same letters of reference appear in both engravings. The cylinder, A, rocks on trunnions, On its upper cover it carries a bracket, E, which serves as a fulcrum for a lever, F. In this lever there is a boss, through which there passes a pin, G, forming a portion of a double-armed lever, H H, which at one end is connected to the valve spindle and at the other to a slipper block, K, sliding on a curved bar or link. L. This link is pivoted to the framing at its center by a stud, M, which is on a line drawn through the center of the crankshaft and the center of the trunnion. It can be moved and set to various positions about this stud by a reversing lever and quadrant, not shown in the engravings.

The curvature of the link is struck from the center of the trunnion, and when the link is in mid-position the slipper moves backward and forward on it without any vertical motion, and consequently there is no movement of the valve. If the link be tilted either way, the lever, F, is made to oscillate on its fulcrum, G, as the cylinder rocks, and the valve is moved to and fro, admitting steam to drive the engine backward or forward, according to the position of the link. The motion of the valve is reversed when the cylinder attains its maximum swing in either direction, and hence it follows that the mechanism we have already described, and which by itself is not novel, is not able to give stroke of the engine equal to the sum of the lap and

connected by a link, O, to a lever, P, carried by a bracket, R, attached to the cylinder. The further end of the lever, P, is coupled by a link, U, to the crosshead of the piston rod, and follows its motion. When the

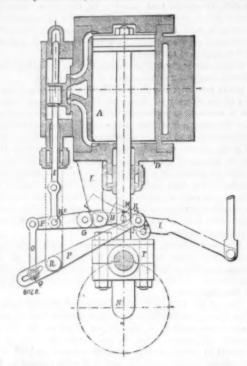

piston descends, the lever, F. rises, carrying up with it the pin, G, and forcing the lever, H H, to oscillate about the center of the slipper, K, and to raise the valve. The levers, P, F, and H, are so proportioned pansively, a second motion is imparted to the valve the position of the curved bar or link, L. By varying melting silver. - Comptes Rendus; Amer. Jour.

from the piston rod. The outer end of the lever, F, is the position of the enrved bar, the total travel of the valve can be changed as desired. The slot in the end of the lever, P. permits of the slack caused by the wear of pins being taken up.


Driving a Spike under Water.

In mill work, especially when making repairs, it is often necessary to drive large spikes in water to the depth of two, three, and even four feet. Starting a spike by hand, and then attempting to drive it by means of a crowbar, is an unmechanical proceeding, to say the least. The Manufacturers' Gazette says one of the neatest and also the best ways of effecting the desired object is to get a piece of steam pipe of suffi-cient size to permit the spike to drop easily through it. Place one end of this pipe upon the spot where the spike is to be driven, drop the spike into the pipe, point first, and then follow it with an iron rod just large enough to slide easily in the pipe. By using the iron rod as a battering ram, or like a churn drill, the spike can be easily and quickly driven home without spattering the person with mud and water.

An improvement on this spike-driving rig may be made by getting a cast iron ball of two, four, or six pounds weight, drilling a hole through the ball sufficient to receive the iron rod, also drilling another hole to receive a set screw. By screwing the set screw down upon the rod, the ball can be held in any desired position. This ball gives extra weight to the driving rod, and, in fact, forms a kind of hammer whereby the spike can be more quickly driven home. It will not work well if you try to drive the spike by means of the rod and a sledge hammer. It is better, by all means, to rig up the ball above mentioned, which will do the work well and quickly.


Radiations from Melting Platinum and Silver.

M. J. Violle has studied these radiations by means of a thermopile, one surface of which received the radiations and the other was exposed to a known source as to give the slide valve an amount of travel at each of heat in such a manner as to bring the needle of the galvanometer to zero. It was found that the total raeither lap or lead. To enable the steam to be used ex- lead, and this is a constant quantity independent of diation of melting platinum is fifty-four times that of

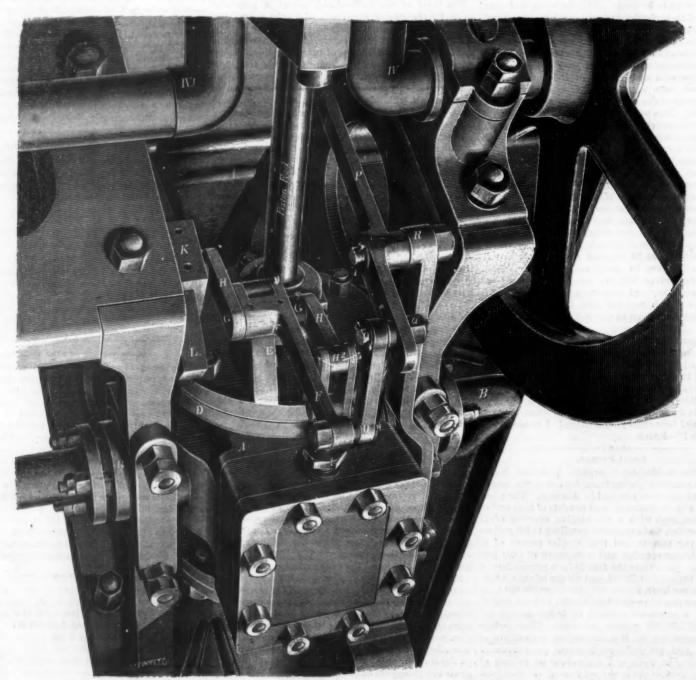

IMPROVED VARIABLE EXPANSION GEAR.

AN ADJUSTABLE PITCH SCREW PROPELLER.

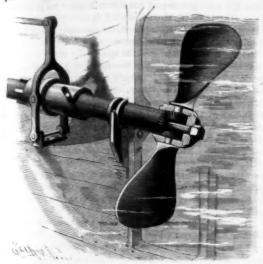

STEVES AND HILL'S SCREW PROPELLER

shown in the accompanying illustration, and has been patented by Messrs. William J. Steves and Andrew J. Hill, of Mechanicsville, N. Y. A sleeve, having on its rear end a beveled gear, is mounted on the propeller shaft, and the shank of each propeller blade, projecting down through the hub, is made with an integral bevel gear to mesh with that of the sleeve. The latter has collars where it passes into the hull, and on its interior end are four integral pins, which are received in the cam slots of a second or reversing sleeve, mounted upon the shaft and upon the inner end of the first sleeve. The inner end of the reversing sleeve has a wide interior collar with a series of longitudinal grooves engaging with corresponding feathers formed longitudinally on the shaft, there being also an exterior collar in alignment with the interior one, the exterior collar being engaged by an interiorly grooved ring having trunnions on opposite sides, journaled in the U-shaped arms of a lever, whose lower ends are fulcrumed upon a pillow block fixed to the bottom of the boat. To the upwardly extending arm of this lever is pivoted a rod adapted to extend back to the engine room or other convenient place, where it may be operated by hand or steam power. While the propellers are revolving, a movement of this lever and strap will also move the interior sleeve, and its cam slots, through the pins on the inner end of the other sleeve, will revolve the latter, with its bevel gear, to turn the flukes of the propeller to the desired angle or pitch.

AN IMPROVED HOUSEHOLD ASH SIFTER

A convenient sifter and receptacle for ashes, whereby the partially burnt coals can be effectively separated from the ashes, and the work can be easily done at the




FALARDEAU'S COAL AND ASH SIFTER.

fireside without causing annoyance or inconvenience illustration, and has been patented by Mr. Dennis L. a pocket on its inner side in which may be placed shot Falardeau, of Cohoes, N. Y. The sifter is supported or other weights, for making the different portions of within a case or outer vessel, which has a pivotal bail the cutter head occupied by the several bits of like

An invention providing means whereby the blades of imperforate, the other part being made of fine wire the bits for such purpose, as has been common hitherto. be sifted are passed, the door being hinged at one side and having a latch or lock button at the other edge. There is also a door, arranged to be buttoned or latched, in the lower portion of the sifter, through which the sifted coal or cinders may be discharged, when the sifter is lifted by its bail from the outer case. The sifter is hung on trunnions at its ends in suitable brackets fixed within the outer case, and is rotated by a crank applied to one of the trunnions, the outer case being made large enough to hold a considerable accumulation of ashes, and its close-fitting cover being left on until all the dust from sifting has settled, when the slate and clinker can be conveniently picked out, and what remains is ready to be put on the fire, the meshes of the wire cloth in the sifter being fine enough to save all the small coals. The sifter may also be made to be supported from trunnions on its opposite sides, resting in the forked upper ends of stirrups pivoted on lugs in the bottom of the case, when the sifting is done by rocking the sifter by means of a shaker bar extending through one end of the outer case. A sifter and ash receptacle of this kind can be kept and used in any room of a house, where most convenient, without scattering dust over clothing and furniture.

AN IMPROVED SIGNALING APPARATUS.

A signaling apparatus designed for a variety of pur- head and bits the latter do not drag and leave creases

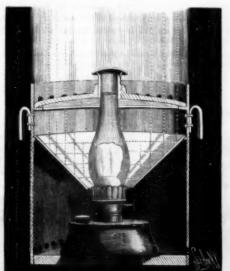


QUATERMASS' SIGNALING APPARATUS.

illuminating the rigging and signaling on shipboard, for store windows, for use on railroad trains, etc., has been patented by Mr. Reuben Quatermass, of Moline, Kan., and is shown in the accompanying illustration. A cylindrical casing, adapted to receive a lamp, is made with a perpendicular sliding door, the casing having a series of draught holes near its bottom and ledges upon its inner walls, just above the lamp flame. An inverted conical reflector surrounds the lamp, its outer edges resting upon these ledges, the light striking and being reflected upward, as shown in dotted lines. Upon a ledge in the casing, near its top, rests a glass concavoconvex shield, centrally apertured, and having a threaded collar, to which is fitted a cowl for receiving arm of the strap extends forward under the clip plate the products of combustion and allowing them to escape without permitting rain or snow to enter. Any loosely with respect to the axle in turning. With this water or snow deposited on this glass shield runs out construction all the parts can be readily put together or through a series of holes in the casing in a line with the taken apart, and they are not liable to quickly wear out. edge of the shield. By means of this lantern a column of light may be projected to a great height, illuminating the smoke and steam of a locomotive, so that they may be seen over the tops of embankments, trees, etc., and producing a halo visible at long distances.

AN IMPROVED CUTTER HEAD.

A cutter head with which the bits are interchangeable, in such manner that both ends of the bits may be worn alike, and which can be readily adjusted to balance accurately, is shown herewith, and has been patented by Mr. John C. Humphreys, of Braxton et House West Va. The cutter bar, stock, or bit holder has a series of exterior convex surfaces, eccentric to the axis of the cutter bar, as shown in the cross sectional view, Fig. 2, and is shaped so that, looked at from opposite ends, it presents two three-leaved cams, each of which extends half the length of the entter bar, the bits of one series being intermediate of those of the other. The bits are secured to their places by screws passing through open-ended slots and washers in the bits, the washers fitting within countersunk from the escape of dust, is shown in the accompanying marginal portions of the slots, and each washer having to carry it by and a close fitting cover. For a little weight. By removing or adding weights, the adjust-

more than half its depth the sifter is made closed or ment can be very accurately effected without grinding a propeller may be changed to any desired angle or pitch required, without the stoppage of the engine, is but a considerable portion of this perforated part is time, and project at such tangents and are so shaped made as a door, through which the coal and ashes to on their backs that their outer surfaces back of the cutting edges lie inside of the circle described by the cutting edges, thus cutting the wood at an angle of fifteen to twenty degrees, instead of about forty-five, as has been common heretofore. With such a cutter

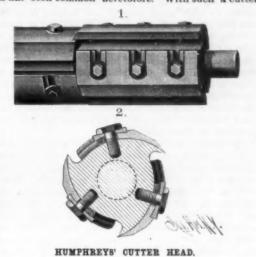


poses requiring an upwardly projected light, such as or ridges in the surface of the wood being dressed, but make a smooth cut, while economizing power.

To Free Iron or Steel from Rust,

As often happens, a chance now occurs to note a proess whose value should not be underestimated. A bookbinder wishing to blacken iron places rusty iron or steel in stale beer (triple beer). After five or six days the rust is perfectly dissolved from the metal, and a dark brown to black surface takes its place. Some days later the rust reappears. This affords a ready means of cleaning old or delicate iron objects from rust. - Uhland's Tech. Rund.

AN IMPROVED FIFTH WHEEL.

A fifth wheel for vehicles, so constructed that it can be readily taken apart and put together, while it has great strength and simplicity, is shown in the accompanying illustration, and has been patented by Mr. Edward H. Cox, of Slate Lick, Pa. Fig. 1 is a plan view and Fig. 2 a longitudinal section, Fig. 3 showing a plan of the upper fifth wheel plate, and Fig. 4 a modified form of the lower fifth wheel, with inclined bearing arms in lieu of the base ring, for vehicles in which the front axle does not turn under. The lower fifth wheel plate, axle stock, and axle are bound together by clips passed through the usual bottom plate. The upper plate, head block, and spring are likewise bound together by clips, and the king bolt, in front of the axle, is passed through forwardly projecting eyes formed on the upper and lower fifth wheel plates and on the bottom plate. The front end of the reach abuts against the rear end of the head block, to which it is secured by the top and side stays. A reach plate of the upper fifth wheel, bolted to the under side of the reach, has a bottom extension with a downward opening slot in which the rear base ring on the lower fifth wheel is fitted to turn. An offset strap closes this slot. preventing the base ring from rattling, and the lower and receives the king bolt, on which it thus swings

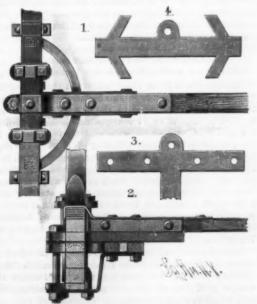

COX'S FIFTH WHEEL FOR VEHICLES.

INTERNATIONAL EXHIBITION AT GLASGOW.

The buildings are now in course of erection for the great exhibition to be held at Glasgow next summer, and our illustration represents the main structure, which will be semi-Oriental in design, and which will be surmounted at the center by a dome 120 feet in height and 90 feet in diameter. The buildings will, in all, cover about ten and a quarter acres of ground. Everything relating to the exhibition is being attended to with much energy, and judging from the fact that Glasgow is the second largest city of Great Britain, with a population, including its suburbs, of nearly 1,500,600 people, and inasmuch as it is visited annually by thousands of tourists en route for the Trosachs and the Scotch lakes, there is no reason to doubt of the success of the enterprise. The executive council includes some of the leading nobility and most prominent citizens, and the chairman is Sir James King, Lord Provost of Glasgow. A guarantee fund of over \$1,200,000 has been subscribed.

The exhibits will be of a widely different character, and will include such classes as: Agriculture, including horticulture and arboriculture. Carriages, including bicycles, tricycles, and ambulance appliances. Chemistry and chemical and philosophical apparatus and instruments. Civil engineering. Cutlery, firearms, etc. Educational appliances and apparatus for physical training. Electricity, fine arts, fishery, food, furniture, gas, and other illuminants. Heating and cook ing apparatus. Jewelry machinery. Mining and metallurgy. Musical instruments. Naval architecture and marine engineering. Paper, printing, bookbinding, and stationery. Pottery and glass, Railroad appliances. Textile fabrics, leather, India rubber, gutta

go to the stamp mill-perhaps several miles awayand there it must be pounded into fine mud and sand, which in turn is run over a system of sieves, jiggers, and slime tables, undergoing an elaborate process of mechanical separation of the copper from the sand, after which the copper must be taken to the smelting works, and then east into ingots, when it is ready to be sent to market.

Few, even mining men, who are not acquainted with the details of the work at our Michigan copper mines are ready to give credence to the statements that rock which has a gross value of but \$1.65 per ton, or less than 15 pounds of refined copper, on an average, to the ton, can be mined at a depth of more than 1,000 feet below the surface, hoisted, broken, stamped, washed and separated, smelted, and taken to market and sold, and still leave a net profit of 22 cents on every ton. Yet this was the year's result at the Atlantic mine in 1885, is equally favorable for 1886, and the company paid a dividend of \$1 per share to the shareholders.

In order to accomplish this, 800 tons of rock were raised and stamped per day. Each year, as the price of copper has diminished, the daily production has been increased, in order to reduce the average cost. Ten years ago, when there were but 230 tons of rock mined and treated per day, the average cost was \$3.90 per ton at this mine. The cost of stamping and washing was then 88 cents per ton, while now it is but 30 cents. The total average cost per pound of copper obtained at the Atlantic mine ten years ago was 22 cents, in 1885 the same was produced for 91/2 cents. mine is no richer now than formerly, in fact, there has been, practically, no change in the quality of the rock.

house, and passed through breakers, whence it must tion of such work. No copper mine in Michigan can be successfully operated otherwise than by all this necessary outlay. As soon as the deposit has been proved sufficiently to justify its permanent working, then the rock house and stamp mill must be provided for. Hundreds of thousands of dollars must be judiciously expended before the mine becomes established as a working, paying enterprise.

Iron.-Not so with an iron mine. In some of them, in their earlier stages, it is the simplest of excavating work, a mere open pit in which the ore is dug out and loaded into cars. Generally, even when the ore is thus mined from an open cut, more or less stripping must be done before the ore can be reached. But this sort of mining is only applicable to the soft ore mines-hematites-and to these, when true of them, only in the first year or two. There are usually difficulties met with that, to be overcome, require the exercise of skill, experience, and improved appliances to insure economical production. Still the ore only has to be mined. There is no subsequent manipulation required to render it marketable.

Thirteen years ago all the iron mines in the State, with one small exception, were wholly open to daylight, and the aggregate production was 1,000,000 tons. Now nearly all are worked underground, and the aggregate production, annually, has mounted up to 3,000,000 tons. Great change has taken place in the iron mines in the last few years. In the large mines, as the Cleveland, Lake Superior, Republic, Chapin, etc., the old and inadequate machinery has given place to that of the most costly and powerful character for hoisting, for pumping, and for drilling. The wooden buildings in which the machinery was formerly held have been supplanted by stone structures with iron roofs, which Great attention is to be given to the exhibit of naval The advantage gained is due to improved facilities for are safe, substantial, spacious, and elegant. Ponderous



MAIN BUILDING OF THE INTERNATIONAL EXHIBITION TO BE HELD AT GLASGOW, SCOTLAND, IN 1888.

engineering and architecture, and a special attraction [mining and manipulation, to a better comprehension will be the exhibit of model boats, which will be held upon the waters of the navigable river Kelvin, which passes through a portion of the park where the exhibition is to be held.

For the benefit of American exhibitors, it may be said that special rates have been fixed for the transportation of exhibits on most of the principal transatlantic lines, and these have further agreed to carry back, free of charge, all goods that remain unsold at the close of the exhibition. All applications for space, etc., should be made before November 1. The American correspondent is Mr. A. MacCorkindale, of the Mutual Life Insurance Company, New York, who is prepared to give information concerning the requirements and to furnish blanks. It would be possible for exhibitors from this country to ship goods to Glasgow, and, after the close of the exhibition, to send their exhibits from there direct to the Paris exhibition of 1889.

Lake Superior Copper and Iron.

REVIEW BY C. D. LAWTON, COMMISSIONER OF MINERAL STATISTICS.

There has been great improvement in the mining industry since one year ago; this is especially true of the iron mines. The advance in the price of copper from 10 cents per pound to 12 cents, which occurred during and which price the present year, caused a feeling of relief in the copper district, the outlook became far more hopeful, and increased activity prevailed. Copper mining in Michigan has become a very uniform industry; prices may vary, but the work at the mines goes on steadily with little apparent change. There is all the while a gradual increase in the magnitude of the operations, resulting in an increased production and a corresponding lessen-

Comparatively few comprehend the scale on which all the work is carried on at our great copper mines. They do not realize the fact that the rock from which the finally smelted before it can be sold. All these succescopper is eliminated must be mined far underground sive manipulations require mechanical appliances that at a depth of from hundreds to thousands of feet, and are elaborate and costly. Great skill and experience

of the work.

The Atlantic mine has been referred to simply for illustration. There are others which afford an equally favorable showing, and altogether these results make apparent that no business in the land of equal magnitude is more systematically and carefully conducted than is the copper mining industry of Michigan. There is none more legitimate or that is conducted with more freedom from speculation and from those manipulations of stock which unfortunately too frequently characterize mining.

Copper mining in this State can be made, and is made, as certainly profitable as are other undertakings requiring large expenditures of money. The mineral lodes are pretty well understood; it is known, generally, what they will yield, the conditions are understood, the elements of the problem are in hand. The leading mines have demonstrated their ability to meet all the conditions, and to conduct their operations so that an annual profit shall accrue with assured regularity. Mining, like other enterprises, can be carried on with such recklessness and extravagance that utter ruin must result, and if there are conspicuous instances of failure in the recent history of the copper country, the unfortunate results may be traced to causes that were predicted in advance with all reasonable certainty; while good management in all instances, when the conditions were favorable, has been attended with success.

The progress which has characterized the copper mining industry has also, in an equal degree, entered into the work in the leading iron mines. Copper mining of necessity requires a great preliminary outlay. The work cannot be successfully prosecuted otherwise. The rock, after it is mined, unless it is mass copper, must be crushed and stamped to great fineness, washed to separate the copper from the rock, and the copper thence be raised to the surface, taken to the rock are essential on the part of those who have the directions of it, so as to give the view all around,

steam engines, air compressors, and immense winding drums are the order of the day in all our great iron mines. The use of electric lighting and electric bells is becoming general. At the Chapin, Ludington, Vulcan, Lake Angeline, Lake Superior, Hematite, and Barnum mines, which have vertical shafts, cages are used instead of the skips ordinarily employed, thus securing important advantages.

The best steel wire rope is used, and catches which hold the cage should the rope break. The men are taken down into the mine or brought up from it nine at a time, without loss of time and without labor.

A New Secondary Battery.

The Societe Industrielle of Brussels has constructed a new accumulator, the invention of M. Tamine, a civil engineer. The element is composed of a number of connected plates for a positive and a thin sheet of lead, 1 mm. (1 inch) in thickness, for negative. The following is the composition of the liquid:

Saturated solution of sinc sulphate	1,000	parts.
Sulphuric acid, 10°	300	64
Ammonium sulphate	50	44
**		AT

The solution of mercury and ammonium sulphates are first prepared. It is poured into the acid, and the zinc sulphate is afterward added. The electro-motive force is 2'8 volts. The element is formed in an acid bath. It is then slowly discharged in the liquid just described. The negative becomes covered with oxide. The discharge on open circuit is prevented by the presence of ammonium. - Bull. International de l'Elec.

Balloon Views of the Polar Regions.

A correspondent suggests the possibility of attaining a view of the polar regions, far beyond actual travel, by means of a photographic magnetically directed and electrically regulated (opened and closed) balloon, sent up under favorable conditions, a mile or more. It can surely be done. Of course there might be lenses on all

How Stoves are Put Up.

This being the season of the year when multitudes of people are adjusting their heating apparatus, preparing for cold weather, some will recognize their own experience in the following amusing description from the American Artisan of the way it is sometimes done:

In the first place, the man puts on an old and very ragged coat. Then he puts his hands inside the place where the pipe ought to go, and blackens his fingers. and then studiously makes a black mark down the side of his nose. Having got his nose properly frescoed, the man grasps one side of the bottom of the stove, and his wife and the hired girl take hold of the other side, and in this way the stove is started from the woodshed to the parlor. In passing through the door, the man carefully swings his side of the stove around and jams his thumb nail against the door post. At last the stove is set down in the proper place, and the man and his wife and the hired girl set out in a triangular search after the stove legs. Two are finally found inside the stove, where they have remained since spring, and the two others are found hidden under four tons of coal. Then the old man holds up one side of the stove, while his wife puts two of the legs in place; then he holds up the other side while the other two are being adjusted, and one of the first pair is displaced. The trick of getting the four legs into their proper place is practiced with varying and indifferent results for some ten minutes, and by this time the man gets excited and reckless, and throws off his coat, regardless of the consequences.

Then the man goes for the stovepipe and gets a cinder in his eye. The stove was put up in first-class shape last year by the stove man, but this year the pipe proved to be a little too long. So the man jams his hat down over his eyes, takes a piece of pipe under each arm, and starts for the tin shop to have it fixed. Then he comes back, steps his muddy boots into one of the best parlor chairs to see if the pipe will fit, when his wife makes him come down. In the act of descending he plants his foot square down on the hollow of the eat's back, and comes within an ace of trampling the baby under foot. Then the man gets an old chair from per square inch, nearly double that of ordinary steel tubes of close texture, and various lengths and sizes, the kitchen and climbs up to the chimney opening again, and makes the startling discovery that in cutting off the end of the pipe, the tinner had made the pipe too large to enter the hole in the chimney. So that of iron and three times that of German silver. Its the man goes into the back yard and splits one side of the end of the pipe with an old ax, and squeezes it mined and found to be much less than iron. The combetween his hands until he makes it smaller.

Then the man gets the pipe into shape only to fled that the stove does not stand true. Then the man and his wife and the hired girl move the stove to the left, and the legs fall out again. The legs are replaced and the stove moved to the right, and there is another seance with the legs. Then the elbow is found not to be even with the hole in the chinney, and the man goes into the woodshed after some little blocks. Then the man and his wife and the hired girl essay to put the blocks under the legs, and the pipe comes out of the chimney. The pipe is replaced in the chimney hole, when the elbow commences to topple over. The man's wife is visibly agitated, and the man gets the dining table out of the kitchen and balances an old chair on it, and makes his wife hold the chair while he performs acrobatic feats on the grand combine, in an effort to drive some nails into the ceiling, during which per- Pa. Four retorts are used, making 50,000 cubic feet of formance the man drops the hammer down upon his wife's devoted head, and she surprises him with a yell worthy the emulation of a Comanche Indian.

Finally the man completes the grand act of driving the nails, constructs a wire swing to hold the elbow in The process requires oil, the diffusion of which is efposition, hammers the pipe a little on one side and fected by superheated dry steam. For illuminating then a little on the other, pulls one joint a little here and pushes another length a little there, gives vocal expression to a series of deprecatory and mildly profane adjectives, takes a long breath, breathes a deep-drawn sigh of relief, and proudly announces that the job is finished.

Fine Threads.

The production of extremely fine threads of glass, quartz, and other materials has been brought to a method which he found most satisfactory in its results degree, 2,000° to 2,500°, cutting down every form of bar the British Museum. This fossil was taken from the attached by sealing wax to the tail of an arrow made the furnaces; and this without the use of any solid be the distant progenitor of the present British species. of a piece of straw a few inches in length; the glass fuel. The method of developing the heat is accomplishevery successful shot the thread was continuous from to the air pipe, and within a few inches of the outer locomotives had been adopted for use in the streets of the piece held in the hand to the arrow 90 feet off, a wall of the furnace. At this point the gas and the air blast | Minneapolis, Minn., Wood and Iron, of that city, says: glass thread 90 feet long and Tesse inch in diameter mingle, forming an explosive mixture; the combustion During last winter and early spring some experiments holding the glass tail in the hand, a little bead of glass fuel than one volume of illuminating gas with fifteen attendance to help it out of difficulties. These "soda" may be fused on the end, and, when the arrow is shot, the inertia of the bead is sufficient to draw out the feet heat for melting steel (2,500°) was attained in this expenditure of more than \$50,000 in a vain attempt to thread in the same way.

of minerals, and found that while some behave like glass, ble on this occasion contained 100 pounds of scrap steel." ment, bad designs, and worse workmanship.

others will not draw at all, being either perfectly fluid like water or when cooler perfectly rigid. Thus corundum, hornblende, zircon, rutile, cyanite, fluorite will not draw at all; on the other hand, emerald and almandine will draw, but care is needed to obtain the proper temperature. Orthoclase draws readily, but quartz, though troublesome and requiring more force, yields remarkably successful threads of extreme minuteness, in some cases tapering down to a size beyond the power of the microscope to resolve. These minute threads have some peculiar properties which the author proposes to investigate; they are highly elastic, and it is suggested that they may be advantageously used for torsion threads. They may also be preferable to spider lines for the cross wires in the eye pieces of microscopes and other instruments.—Phil. Mag.

A New Steel.

Prof. W. F. Barrett lately read a paper before the British Association on the physical properties of a nearly non-magnetizable steel. At the Aberdeen meeting Mr. J. T. Bottomley draw attention to a new steel recently manufactured by Messrs. Hadfield & Co., of Sheffield, which contained some 18 per cent of manganese, and was almost wholly unmagnetizable. Mr. Bottomley's experiments showed that the intensity of magnetization that could be imparted to it was some 6,000 times less than that which could be given to steel. Hence it was evident that manganese steel is a remarkable body. The author had, through the kindness of Messrs. Hadfield, and after some difficulty, succeeded in obtaining this steel drawn into wire.

One of the most curious properties of the steel is that it is annealed in the opposite way to ordinary steel, which is hardened by being suddenly cooled, whereas manganese steel is softened by this process. The modulus of elasticity of manganese steel determined by Prof. Barrett was 1,680 × 10.6 grammes per square centimeter—a singularly low value, lower than iron. The an Englishman, Mr. John Abbott, as early as 1792. Mr. tenacity of the substance is, however, greater than ordinary steel. The breaking strain of a No. 19 wire of hard manganese steel, Prof. Barrett found, was 110 tons wire, and only exceeded by the finest and hardest pianoforte steel wire. The resistance of manganese steel wire was found to be very high, about six times change of resistance for temperature was also deterparison of its magnetic power with that of iron was examined, and in an intensely powerful magnetic field the ratio of magnetism induced in iron and manganese steel was about 1,000 to 8.

In conclusion, the author showed that manganese steel wire did not exhibit the anomalous expansion in made tubes were found covered on the outside with cooling nor afterglow which is found in ordinary iron and steel wires, and thus a new connection between molecular condition and the magnetic state was revealed. Many uses of this remarkable material suggest themselves, among others the construction of iron ships with no compass error, the bed plates of dynamos, resistance coils, and non-magnetizable watches.

A New Gas Process,

The American Light and Heat Company's new process for making fuel gas was recently tried at Darby, gas every twenty-four hours. The gas is manufactured by direct process, and delivered to the holder after a simple washing. It is of 22 candle power; and there is said to be absolutely no deposit from the gas flame. purposes, and on a large scale, 5 gallons of oil are stated to make 1,000 feet of gas; although 6 gallons are required at Darby. The cost is, therefore, about 30 cents per 1.000 cubic feet for 22 candle power gas. This gas has a heating capacity, it is claimed, exceeding considerably that of coal gas made in the ordinary way. At Darby it is taken a distance of 50 to 70 feet to a floor set with suitable furnaces for metallurgical purposes; and there it is used for melting steel, and for forging, welding, shaping, and manipulating iron and steel in high degree of perfection by Mr. C. V. Boys. The every way. It gives a quick heat of the highest was the following: A fragment of drawn-out glass was iron or bar steel placed in an opening of any one of ed, says a contemporary, "by using an air blast of no change since this, its first apparition. while the end was held in the fingers, the arrow was about 6 ounce pressure, delivered into a combustion projected by a cross bow of pine held in a vise and chamber from opposite sides. The illuminating gas is with a trigger that could be pulled by the foot. With delivered through a one-half inch pipe, at right angles being obtained. The diameter was almost perfectly and evolution of heat being instantaneous. This inuniform for the greater part of the length. Instead of stant production of a high degree of heat without other volumes of cold air is the great characteristic. A per- engines were abandoned several months ago, after an instance in 2 hours and 27 minutes by the use of 1,400 make them successful. We do not believe that the cubic feet of gas, as measured by the meter. The cruci-

Dedication of the New Building of the College of Physicians and Surgeons of the City of New York.

The new buildings of the above college, the gift of the late Mr. Wm. H. Vanderbilt, with the building entitled the Vanderbilt Clinic, the gift of his sons as a memorial to their father, and the Sloane Maternity Hospital, the gift of Mr. William D. Sloane, were dedicated September 29, 1887. The three buildings, situated on 10th Avenue and 59th and 60th Streets, in this city, represent a total expenditure of more than double the original endowment of \$500,000. The main college building, modeled in the general style of the old structure on the corner of 22d St. and 4th Avenue, is devoted to cabinets, lecture rooms, dissecting rooms, and chemical and biological laboratories, all of the most advanced type. The dissecting room will accommodate 36 tables, so that 180 students can work at once in it. It is lighted by skylights, and incandescent electric lamps are supplied for all the tables, so that work can be done in it by night as well as by day. The lecture rooms are large enough to accommodate 450 students each at one time. The clinic intended for demonstrations by actual operations includes the neces sary rooms and the amphitheater to be the scene of many conflicts with accident and disease. The Maternity Hospital, severely finished in its interior with white marble, contains 30 beds free in perpetuity. The exterior of the buildings is of brownstone and brick. In the dedication, the leading members of the medical profession and many leading citizens participated.

The Nesting Spider.

Dr. M'Cook gave, before the British Association, the result of observations on the nesting habits of Atypus niger, a Florida spider. Referring to the original description of the black atypus of Florida, made by Hentz in his "Spiders of the United States," Dr. M'Cook said that a good drawing of the species had been made by Abbott quite happily described the creature as the 'purse web spider," and made a brief and correct note of its habits. The nests of the black Atypus are silken which are spun against the bark of trees, nearly equal portions being above and below ground. Some of the tubes are 12 inches to 14 inches long, and one-half inch to three-fourths inch in diameter. Others, the nests of the young, are a few inches long and the thickness of a pipe stem. The inside of the nests is quite white and clean, the outside is weather-stained and covered with sand. The mode of spinning these was described in the paper. The work is done in sections, the length of the tube being accomplished by adding to the original section until the desired length is attained. The newsand. The spiders were not seen in the act of sanding their nests, but a similar habit in Atypus piceus of England has been well observed and freely described by Mr. F. Enock, who made the interesting discovery that the sand is forced through the texture of the web from the inside.

The close relations were pointed out between the nesting tubes of Atypus niger and Atypus piceus. The chief differences seemed to be that the former suspends the exterior part of its tube against the trunk of a tree, attaching it thereto by threads, while the latter suspends it to stocks of grass and weeds, or trails it along the ground among the herbage. It was, said Dr. M'Cook, interesting to compare the nests of the group of spiders known as the tunnel weavers, to which Atypus belongs. Beginning with the great hairy spider, tarantula, the giant of the order, we have a simple burrow, whose opening is sometimes covering a patch of spinning work. Second in the series may be placed Cyrtochenius elongatus, whose nest is a silk-lined burrow, the lining of which is carried above the earth in the form of a funnel-shaped tube. In the nest of Atypus piceus this funnel appears at times as a long tube of nearly uniform size, extending horizontally along the ground. Next comes the nest of Atypus niger, already described, and then the trap-door spiders of various American and European genera.

After further tracing the tube-making habit, Dr. M'Cook mentioned a fossil spider which he had seen in Eocene tertiary at Garnet Bay, Isle of Wight, and might

The Soda Engine.

Referring to repeated recent statements that "soda" were made with a so-called soda engine, and the "soda engine" did make a few trips with a steam engine in

MACHINES FOR MAKING PACKING BOXES.

describe are of American origin, and are designed for the manufacture of packing boxes.

The wood, in the form of boards, after being sawed into pieces of the proper dimensions to form the sides of the box, is planed by powerful machine tools, which, while making it even and smooth, regulate its thick-The pieces are next printed with cuaracters in black in a rotary machine analogous to a newspaper This operation is performed very quickly. In

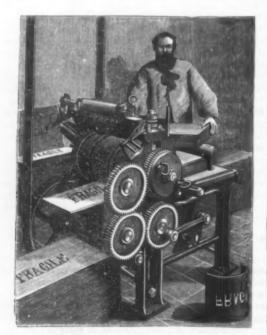


Fig. 1 .- MACHINE FOR PRINTING ON WOOD.

addition to its being printed with an indelible ink, the inscription is stamped in the wood, thus making it ineffaceable.

The machine that does this (Fig. 1) consists of a table, an ink block with its inking rollers, and two cylinders, the whole actuated by gearings and pulleys.

The workman places a pile of the prepared wood on the table, and a tappet actuated by a rod beneath the table shoves out the bottom piece from the pile, and this is caught between the cylinders, which carry it along and print an inscription on its upper surface, as shown in the engraving. Immediately, and at every revolution, one of the pieces is printed and put upon the pile in front of the machine. Above the upper eylinder is placed an ink block, which, through an arrangement that is as simple as ingenious, deposits the necessary quantity of ink on the type.

The printed wood is next passed to the nailing machine (Figs. 2 and 3), which is actuated by a belt running over a pulley driven by a line of shafting. The and from that date to the end of the 18th century every

workman, standing in front of the machine, places his foot upon a pedal which acts upon a coupling box that throws the machine into gear. In a single revolution, the pieces to be united are assembled and fastened to each other by a series of nails, varying in size according to circumstances, and brought under the hammers by vertical tubes

A boy, standing upon a platform, places the nails in buckets attached to the links of a chain belonging to the machine. The nail is put head downward into each bucket, then every revolution of the machine moves the chain forward by one line of links and empties the nails, point downward, into the tubes, A (Fig. 8). In order to facilitate the entrance of the nails, the tubes are provided with a hopper at the top. Beneath, the pails enter the hammer boxes obliquely. When the machine moves, the hammer rods rise, the nail slides into the lower part

of the box, which presses against the wood to be nailed. two or three years a mine collapsed. In the present Austen, Chemist of the Royal Mint, London, the iron The hammer at once falls and drives the nail into the century, at considerable intervals of time, collapses of was of excellent quality. A current of 0 089 ampere from wood by pressure, and without a blow. The motion of the machine is at once arrested, and the wood being ception, were old, abandoned "top" mines. The subset free, the workman reverses it or replaces it, and sidences which are so destructive in the town of North- gravity 1,153, in equivalent proportions. This solution then, pressing the pedal again, drives in another series wich and the neighborhood are entirely caused by the was almost neutralized with carbonate of magnesia of nails at the place presented. The nails are driven pumping of brine for the manufacture of white sait. It until it gave a very feeble acid reaction with litmus. very regularly, and are very firmly embedded in the was only about 1770, or shortly afterward, that the first In Russia, plates of iron thus obtained are used for wood. Each machine daily drives, on an average, sinking was noticed. Since that date subsidence has printing bank bills.—Ann. Industrielles.

more than 24,000 nails, weighing altogether about 285 The new and curious machines that we are about to | lb. Each box consists of from 18 to 20 pieces of wood, all sawed out mechanically to fixed dimensions, and which pass successively through twenty or twenty-five hands.-La Nature.

Action of Magnets on Liquids.

Some weeks ago, one of my students, Mr. J. C. Child, and myself were working with a diamagnetic instrument, simply repeating well-known experiments. Plucker's method of observing the diamagnetism of liquids having failed in our hands to give satisfactory results, we hit upon a method which was new to us, and which was very satisfactory. Into a glass tube of about four or five millimeters internal diameter a small quantity of liquid was introduced, forming a short cylinder. This tube was placed horizontally at right angles to the line joining the poles of the magnet, with the liquid nearly between the poles. When the current was turned on, the liquid was very evidently repelled. Water was repelled through a distance of about half a centimeter; wood spirit through a greater distance. By moving the tube in the direction of its length, the wood spirit could be pushed any distance through the tube. The amount of motion is of course a function of the resistances due to adhesion and friction as well as of the repulsive force. The attraction of liquids is easily shown by the same method.

A single modification of the above plan of proceeding is to incline the tube slightly, so as to make the liquid flow toward the poles. If the required velocity be not too great, the magnet acts as a break to stop the motion. It is well to bend the tube up a little at each end to prevent the liquids from flowing out. This method is well adapted for projection so as to S. T. MOREHEAD. be seen by large audiences.

Washington and Lee University,

Lexington, Va., May 9, 1887.

-American Journal of Science.

Subsidence of the Earth over Salt Mines

Mr. Thomas Ward read a paper before the British Association entitled "The History and Cause of the Subsidences at Northwich and its Neighborhood in the Salt Districts of Cheshire." He said :

Northwich overlies extensive beds of salt, occupying about three square miles. The first or "top" rock salt lies at a depth of about 50 yards from the surface, and is covered by Keuper maris, and these by the drift sands and marls. Between the two beds of salt there are 30 feet of indurated Keuper marl. The second or bottom" rock salt is over 30 yards in thickness. These beds of salt occupy the lowest portion of an old triassic salt lake. The first bed of rock salt was discovered in 1670, the second in 1781. The falling in of a rock salt mine is a very rare occurrence, and subsidences of this kind do not give rise to the reports which are met with in the newspapers.

The first reported destruction of a mine was in 1750,

gone on very rapidly, and much destruction of property has resulted. Large lakes, or "flashes," one of more than 100 acres in area, and of all depths up to 45 feet, have been and are being formed. The brine pumps set up a circulation of the salt water, or brine, lying on the rock salt, which flows to the pumping center. The brine thus removed is replaced by fresh water, which on its passage to the pump saturates itself, taking up sufficient salt to make a solution containing about 26 per cent of salt. This continual removal of salt from the surface of the rock salt lowers it, and the overlying earths either follow the diminishing surface continuously or else, after remaining suspended for a time, suddenly fall into the cavity from which the water has extracted the salt. The brine currents, on their way to the pumping centers, form deep valleys or troughs, and the surface of the ground overlying forms a fac-

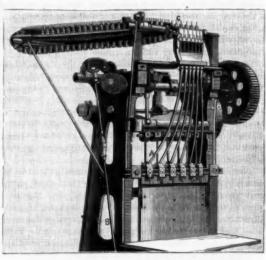


Fig. 3.-DETAILS OF A NAILING MACHINE.

simile of these hollows. The property on the sloping sides of the valley is pulled to pieces and destroyed; the windows and doors all get out of form, owing to the unequal sinking of the various portions of the When, owing to the different nature of the marls and the abundance of sand overlying them, a sudden sinking takes place, the hole extends to the surface and swallows up anything upon the surface—as a horse in a stable, barrels of beer in a cellar, or water butts and other utensils in a yard. The damage done to property is enormous, but thus far no human life has been lost.

Treatment of Sciatica by Refrigeration of the Sound Limb.

Some time ago, M. Debove announced that he had been able to afford marked relief in a case of obstinate sciatica by means of a spray of chloride of methyl applied along the course of the sciatic nerve in the unaffected member. At a recent meeting of the Societe de

Biologie (Le Concours Medical, August 6, 1887), M. Raymond reported that he had obtained favorable results by a similar method in three cases. He found, however, that the effect was the same even when the spray was directed to any part of the limb, and not necessarily along the course of the sciatic nerve. This would seem to prove that the relief of the pain was due to an impression made upon the spinal centers by refrigeration of the peripheral nerve terminations, rather than to a direct influence exerted upon the trunk of the affected nerve itself, or of its fellow in the opposite limb.

On the occasion of the new issue of coins in England in the Queen's jubilee year, the iron dies from which the coins struck were electrolysis. The plaster moulds of the originals first received a coating of copper, and on the template thus formed the iron was deposited. According to Prof. C. Roberts-

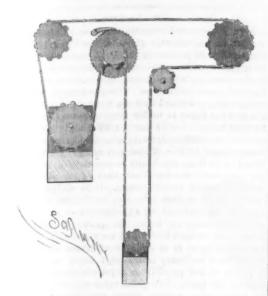


Fig. 2.-NAILING MACHINES IN OPERATION.

HARVARD OBSERVATORY AND THE HENRY DRAPER tographed of the size shown in the cut. Such portion of spectra. In front of the objective a battery of two MEMORIAL.

(Continued from first page.)

constitute the principal working portion of the observatory. The most important work done is of the photographic class, and it is this division that we par-ticularly describe. Prof. Pickering, however, is also engaged on another investigation, which we can only allude to—the photometry of stars. This is executed by himself personally, with an assistant. A polariza-



HUYGHENIAN MOTION.

tion photometer is employed. The results are of much practical value for use in connection with astronomical work, and when completed are destined to form a most important standard of reference.

In a recent article on the Alvan Clark establishment, where the great telescopic objectives of the world have been ground, reference was made to photographic objectives. The photographic objectives used by the Harvard observatory owe their excellence to the Clarks. Such glasses have to be ground with a special view to in the field of focusing the actinic rays. A perfect photographic lens would be quite useless for visual work. In testing them, therefore, recourse is had to photography. Photographs are taken of a star, generally Polaris or the methods of pole star, on both sides of the chemical focus. If the lens is such as to bring all the actinic rays to a focus, the effect of photographing the star as described will be to produce a series of images, varying from a disk to a mere point, and then increasing in size again to a plate. If the lens is out of adjustment, one portion of the disk will develop darker than the rest. We illustrate a series of representations of such test photographs, of the precise size of the originals. They were taken on the same plate of glass exactly as shown. One dicating a faulty shape, which had to be remedied by the manual skill of the Clark brothers, from whom the trated also. In this a spectrum of a bright spot is pho- awarded in 1885. It is now devoted to photography

of the rays as are brought to a focus will produce a spectrum of even width. If the more actinic portion acts thus, the lens is proved correct. The spectra shown, also from the Clark brothers, taper to a point, the broad portion being out of focus. Hence the lens was out of adjustment. The interpretation of these results demands the highest order of skill in the maker of the lens, and it is not too much to say that the high quality of the Harvard observatory work could only be obtained through, and is due to, the unrivaled talent of the makers of the objectives

The telescope shown in the illustration on the first page is contained in a small gable-roofed house. The instrument is erected on a very solid foundation, one which had been used in observing the transit of Mercury in 1878. Attached to its base is a circular level of exceedingly great delicacy, by which it can, when necessary, be adjusted. The building in which it stands is rather peculiar. The gable roof is in two sections, being divided across its center, and is mounted on wheels running on tracks parallel to the ridge. When the instrument is in use, these two segments are pulled apart, to the entire length, if desired, of the building, the rails in prolongation of the plate beams being carried outside on each end of the house a distance equal to one-half its length. The mounting of

also peculiar. A steel tube is carried by trunnions in the end of a large fork. Into this tube the brass tube containing the lenses is screwed. The polar axis is in prolongation of this fork. Hence, if the glass is directed to a given star, and rotated on the axis with sidereal time, the star will occupy the same position

the telescope is

As a simplification of the usual mounting, the plan is of interest. The telescope is carried symmetrically, so that no

focus, the point representing the focused view. If the it any star can be followed uninterruptedly from rising evenly illuminated images upon development of the as any others. It does not seem well adapted for visual work, as the fork mounting would interfere with the observer in the case of polar stars.

The lens is a Voightlander photographic objective of 8 inches aperture, and about 45 inches focus (exactly 114.6 centimeters). To adapt it for stellar work, two of of the disks on the side showed a spot in the center, in- the faces had to be reground. This brought it into perfect condition. With it much work was done in stellar photography under an appropriation from the plate shown was procured. The spectrum test is illus- Bache fund of the National Academy of Sciences,

prisms is carried. At the other end of the tube a sensitive plate occupies the position of the focus. By this extremely simple method, first suggested by Fraunhofer, the spectra of numerous stars are obtained upon a single plate.


For driving it the Huyghenian motion is used. The peculiarity of this system is that it can be rewound without affecting the running of the apparatus. The wheel furnished with a ratchet wheel and pawl is the



PHOTOGRAPHIC TESTS OF OBJECTIVE.

winding axle. When this is turned, the large driving weight is raised and the small weight descends. But during the winding the driving wheel, the one to the extreme right, is continually urged to rotate just as when the winding ceases. The driving weight never ceases to exert its pull upon this wheel, which represents the drum of the ordinary gravity train.

The original work done by this telescope was purely

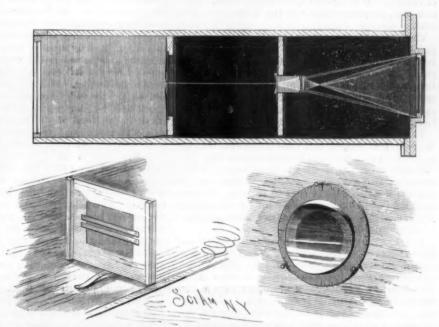


SECTION OF ENLARGING APPARATUS, WITH CYLINDRICAL LENS.

disk. The disks will be given by photographs out of counterweights are needed. This saves weight. With photographic. Under the Bache appropriation, the investigation took the direction of stellar photography. lens is perfectly ground, these disks will appear all as to setting. Polar stars are as easily kept in the field Under the Draper memorial fund, the work of stellar spectroscopy was taken up. The work is now carried on in the following manner.

The prisms are set with their edges horizontal, so that the spectra are vertical. By five or six trials the adjustment for focus is secured, and this lasts for an indefinite period. If now a photographic dry plate is exposed while the instrument rotates by sidereal time, the spectra of all the stars in the field will fall upon the sensitive plate. However long exposed the plate was, assuming all to be in accurate adjustment, the spectra will appear as very fine lines. Their width in general terms is equal to the diameter of the images that would be photographed were the prisms removed and the telescope directed upon them. The largest of the stars would give only a thread-like line to represent its spectrum. The width of this has to be increased for the spectrum to be visible. While this might be done by magnifying the image, a very ingenious application of the principle of "trailing" is used to partially effect the desired result. If the telescope were kept immovable, the stars by the rotation of the earth would sweep across the field of the instrument. This motion with the prisms in place would affect the spectra in the same way. They would be widened into bands. Except in the case of stars near the poles, the motion of the stars across the field would be far too rapid to sufficiently affect the sensitive film, were the telescope kept motionless. Hence in practice it is rotated, but at a rate slightly less than the angular motion of the earth. This slowly widens the spectra, but allows them to act for a long enough time upon the plates to produce a good actinic effect. The exposures under present practice are in the neighborhood of one hour's duration. In this way, instead of narrow, line-like spectra, bands a sixteenth of an inch wide or more are produced. In a subsequent issue we will show how these spectra thus produced appear.

The relative action of the different parts of the apparatus is now clear. The light from the stars strikes the faces of the prisms, and passes through them. The pencil of light from each star is thus refracted, and produces a spectrum with vertical axis and horizontal lines. This falls upon the photographic objective, and is

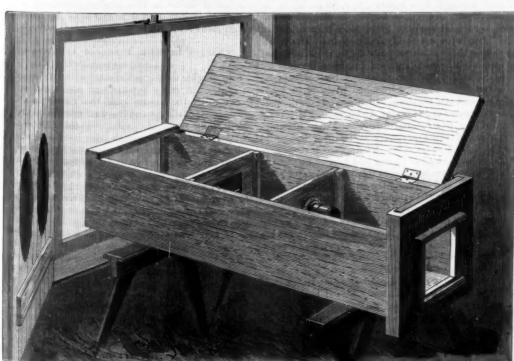

ENLARGING APPARATUS.

tube. There it is received upon the sensitive plate, that of the earth, draws the image out so as to increase its horizontal dimensions and amplify the breadth of the spectrum.

After a sufficient exposure, the plate is taken from the telescope to the dark room and is developed. From the negative thus produced a greatly enlarged positive is produced by the use of the apparatus shown in the cut. The negative is set on edge in a box with ground glass, and by two brass strips and dark paper it is hardened steel roller has not yet been ascertained. completely covered, except the narrow area containing the spectrum. Next to this a concave cylindrical lens is placed. Owing, it may be, to irregularities in the motion of the telescope or to changes in the transparency of the air, the spectra always contain a number of longitudinal streaks. The cylindrical lens, by its dispersive effect, destroys this imperfection. A photographic lens receives the light transmitted through the negative and cylindrical lens, and brings the image to a focus where the image falls upon a sensitive plate. The horizontal streaking is not the only defect of the original spectra. Owing, probably, to variations in the refractive power of the atmosphere, the lines or bars are not perpendicular to the axis of the spectrum. The cylindrical lens is mounted so as to be susceptible of rotation. It is for each spectrum so turned that its axis shall be perpendicular to the inclination of the

The general process is the familiar one of photographic enlargement. Its most characteristic feature is the use of the cylindrical lens and of the metal strips and screen. Great care has to be exercised in this part of the operation to keep the edges of the metal strips clean. Little particles of dust might not being unequally strained, as in forging under a otherwise appear on the magnified image as spectral

The plate, after due exposure, which is executed by daylight, is developed, and gives a spectrum that may be several inches wide and proportionately long. The bars still appear as crossing it at an angle. To produce a straight spectrum, a portion is marked out, giving the lines at right angles to the axis. Thus the faint light of the stars is re-enforced by the daylight, which produces the enlargement and which acts like a telegraphic relay.

Such is a brief summary of the methods as now used. The work is still in development. A great many of the spectra are photographed with a large glass and with prisms of higher dispersive power. Neither can the full scope be understood or the progress of the last few years be grasped without an inspection of the different final photographs and of the successive stages in their production. This and other points will be reserved as the subject of a second article on the Harvard observa-

Metallurgical and Mechanical Progress.

In a paper lately read before the Iron and Steel Institute, by Thomas Ashbury, the author gave a rapid survey of the various exhibits in the machinery and metallurgical sections of the Manchester Exhibition, from which we abstract the following:

The method of manufacturing rollers for spinning machinery was examined in connection with Messrs. Joseph Webb & Son's exhibit. 'The iron for these rollers must be, said the author, of a very close-grained and sound quality. The bars are first cut to length, and calendered or straightened, after which each piece is put into a lathe, ended up, and centered at one end. By means of a Ryder's forging machine, a square end and neck is formed, after which a hole 1/4 in. diam. and 3 in, long is put in at the end of the roller opposite to ported by a steel cylinder 37 in, long, with a bore of the forged end. The next operation is that of punching, and by means of a number of square punches forced quickly, one after the other, into the round hole, it is squared up to the exact size. As this operation is performed on the iron while cold, it is, of course, a very severe test, and unless the iron is of good quality it will split. After punching, the square end is centered and ended, and the roller is stretched very straight and true. The square end is now machined exact to size, to fit the punched hole, so that no filing abutted against some piles. These were further sup-is required when coupled up. After this the opposite ported by large balks of timber laid longitudinally, the end of the roller with the square hole is ended up to ends of which were buttressed by another row of piles, ing, and stretching, the rollers are fluted on a machine which will flute forty-eight at once. There are usually from forty-three to fifty-five flutes to the inch, the different kinds being suited for spinning long or short staple cotton, and varying according to the number of counts required. The rollers are then carefully examjoints are eased and tested so as to be of one uniform tightness. Seventy or eighty rollers are now coupled, and run in one line to be quite sure they are true. They are then polished and packed. Steel has recenttough, it is more costly to turn and flute, and in conse- deflected the shell so that it buried itself 4 ft. down in ter of a silver molecule.

brought thereby to a focus at the lower end of the quence of the necks wearing so rapidly, the life of a steel roller is much shorter than that of an iron one. while the telescope by its motion, slightly slower than An iron roller will last from ten to fifteen years, while a steel one only lasts from one to three years. The steel roller is thus of little use except it be casehardened, and to do this entails considerable extra expense, for besides the cost of casehardening, the rollers have to be again straightened, and this is no small task, as they are very crooked when they come out of the hardening furnace. They have also to be repolished and carefully examined. The endurance of a case

> In reference to the exhibit of the Steel Company of Scotland, Limited, the author described it as being built in the form of a trophy, the corner columns being formed of bars of angle, bulb, and T sections, with rails of various sections. The entablature is framed in plates and channels ornamented with sections of smaller angle, girder, rail, and bar steel. A marine boiler, the front plate of which is shown with flanged openings for furnaces, spans the top. Under the canopy, castings and heavy girder types of trainway rails are shown.

In connection with the exhibit of Messrs. Sir Joseph Whitworth & Co., the author said that in the Whitworth system of forging hollow steel shafts, among the many advantages claimed may be named the facility with which, in the initial stages, defects of any kind can be discovered. By the absence of the central core a thorough, uniform heat is obtained, unequal strains are avoided, and an absolute uniformity of the material is insured. And by the steel being worked thoroughly from the inner as well as the outer surface, there is se cured a regular and even amount of work on all por tions of the forging, with the advantage of the material steam hammer; but a perfectly uniform consolidation of all the portions of the forging is attained, with a gain of strength by a better disposition of the material. so that with a reduction of strains, and much greater elasticity, there is less liability to fracture. The propeller shaft shown by the firm is 55 ft. long and 1814 in diam., with a collar at one end 34 in. diam. by 51/2 in. wide, a hole 10 in, diam, being left the full length of the shaft. This hole is just as it was left in the forging. and has not been bored. The truth of the shaft is remarkable, as will be seen from the short lengths turned. not more than $\frac{1}{16}$ in. difference being noticeable between the forged outside diameter and the finished turned-up diameter. Another exhibit is a portion of a Whitehead torpedo, being the section of the torpedo which contains the compressed air for supplying the propeller engines. This shell or casing is about 14 in. diam. with a thickness of metal ranging from 1/4 in. to 1/4 in. These torpedo air receivers are tested by Admiralty officials up to 1,500 lb. per square inch, while tests up to as high as 3,350 lb. per square inch have failed to rupture or damage the shell. In the year 1881 the Brazilian government ordered in this country an ironclad man-of-war, called the Riachuelo, and part of her armament was four guns of 20 tons each, for which the specification and tender of Sir Joseph Whitworth & Co. was accepted. One of the results guaranteed by the firm was that in a trial the gun should send a 400 lb. projectile through a solid iron armor plate 18 in. thick -an achievement that had never before been either promised or accomplished. On the completion of the first gun, it was subjected to a trial on the sands at Birkdale, Southport, to ascertain whether the stipulated conditions had been fulfilled. For testing penetration, a target was made as follows:

A solid wrought iron armor plate, 18 in. thick, as made by Messrs. John Brown & Co., Limited, was sup-23 in., filled with wet sand, and rammed quite hard, Supporting this was a steel plate 21/4 in, thick, stiffened and supported by 6 in. T pieces, and filled up solid by a series of oak balks 7 in thick. A further support was given by a large cast iron bed plate 20 ft. long, 5 ft. wide, and 141/2 in. thick, which was put on the flat, across the center of the target, and arranged to form a powerful stay, or strut, to support the target backing. The outer end rested on timber at the floor level, and the exact dead length to special gauges, so that when behind which, and covering the whole structure, was a venty or eighty rollers are coupled together in one heap of wet sand, well rammed, about 7 ft, thick. The frozen samples this cannot take place, and the fat is The velocity was about 2,000 ft. per second. The shell, when fired, hit the center of the 18 in. armor plate, and completely penetrated it, giving to the hole made by its passage a twist corresponding to the twist of the shell. It also completely passed through the ined, and the defective ones rejected, after which all 37 in. of hard rammed wet sand, and burst in two pieces the heavy steel hoop containing the sand. It then passed clean through the 21/4 in. steel plate, the T iron backing, and the 7 in. of oak backing. The shell finally hit fair on end the center of the heavy cast by the eye, and arrives at the conclusion that 0.2 milly 'een tried for rollers, but, although it is clean and iron plate, smashed it up completely, and the debris, lionths of a millimeter is an upper limit of the diame-

the solid earth, 17 ft. 6 in. away from the target. The Brazilian government officials, who witnessed the test, reported that the force expended, after passing through the 18 in. solid iron armor plate, was equal to having made a total penetration through an iron armor plate 23 in, thick. The 9 in. shell exhibited is the actual one which went through the 18 in. armor plate, on which it now rests in very much the same condition as when dug out of the earth, and the only punishment shown by the shell is that the nipple is slightly compressed and a slight twist given to it.

The Lucigen.

A very successful demonstration of its great lighting powers was recently given at the Crystal Palace. The method of producing this light consists in forming an intimate mixture of air and minutely divided oil particles, resulting, when ignited, in a continuous, steady flame of great brightness. The mechanism, which is very simple, is worked by a small supply of compressed air, and the flame is under perfect control by merely turning a tap. As the light is produced by the combustion of crude and waste oils, its cost is, by actual measurement by the official gas analyst for Glasgow, found to be from one-tenth to one-twelfth the cost of gas, and about one-twentieth that of electric light of the same actual candle power. It is stated that an area of half a square mile can be flooded with light equal to daylight at an expenditure of one shilling and threepence per hour. As shown at the Crystal Palace, the lucigen illustrated very perfectly the great volume of light it is capable of giving out. It was found that ordinary manuscript could be read at a distance of 150 paces from a jet which was stated to cost 3d. per hour. The great value of this light lies in its diffusiveness, which adapts it so admirably for use on works or where any outdoor operations have to be carried on at night. The true principles of useful lighting, it would seem, are only now beginning to be understood. It has always been overlooked that the eye is the first factor in determining the success of illumination, as it is by the aid given to accurate sight that work is to be done. Now, the amount of light the eye will receive depends on the size of the pupil, and this latter depends on the intensity of the source of light, and not on the amount of light given out. Should the intensity be great, the pupil closes so as to protect the delicate retina from injury, and hence the eye receives little of the light reflected from surrounding articles, and the illumination appears very bad. Should the intensity be low, then the pupil does not close nearly so much, and surrounding articles seem much better illuminated. Hence a naked are lamp in a room is so blinding that work cannot be done; but when an opalescent globe is placed over it, so as to reduce the intensity, the eye sees details in the room much better, although the opalescent globe has cut off three quarters of the light. Looked at in the light of these explanations, the effect of the lucigen may be imagined, as it is said to produce a flame of 8,000 actual candle power, or equal to six large arc lamps, while its radiative surface is about 350 square inches, as against one square inch for the arc lamp. The result is that the lucigen gives a light of a quality highly effective for working purposes

The lucigen marks the latest advance in the history of the production of light from carbonaceous substances, as not only does it raise the carbon particles to the most intense white heat, but the form of the flame is such as to retain them in that condition for the longest period. The lucigen has been adopted at a large number of works in this country, including those of the Forth Bridge, and it is also in use by the French government for military operations. -Iron.

Changes in Milk Produced by Freezing.

BY KAISER AND SCHMIEDER.

Two samples were experimented with. One was frozen slowly, the other quickly, and afterward partially thawed. In the former case, the ice contained the greater part of the fat and the fluid portion most of the casein, milk sugar, and salts. In the quickly frozen and partially thawed sample, the fat was equally distributed between the solid and fluid portions. The author explains this by the fat globules rising to the top when the process of freezing is gradual. They thus become embedded in the flakes of ice; while in quickly line they fit the machine exactly, without the slightest gun was placed 90 ft. from the target, and a charge of more evenly distributed. If a dealer whose milk has variation in length. After coupling, marking, turn- 1971b. of black prismatic powder was used. The weight been frozen pours off the clear fluid which underlies the of the shell was 403 lb. It was made of Whitworth ice, he is liable to the suspicion of adulteration on the one hand or will deliver milk above the standard on the other. Milk which has been frozen should be well thawed and shaken up, and not sold while any ice is visible.-Bied. Centr., from Jour. Chem. Soc.

The Silver Molecule.

In an exhaustive paper upon methods of measuring thin films, Otto Wiener makes certain measures of the thickness of a film of silver which can just be perceived

THE REGAL WALNUT MOTH.

One of the largest and rarest of our native moths is illustrated by the accompanying cut, in which the imago and caterpillar of the Ceratocampa regalis or regal walnut moth are represented. This beautiful insect, in the winged state, flies during the nights of June and July, and can be found at rest with closed wings on fences or old trees during the day. The moth, when expanded, measures from five to six inches across the wings, and its fore wings have an olive-colored ground ornamented by several yellow spots and heavy red veins, while the hind wings are orange red, and each one has two irregularly shaped yellow patches and a row of wedge-shaped olive-colored spots. The head and body of the moth are colored orange and red like the hind wings, and the head is also adorned with two prominent feathered feelers. The thorax is yellow, with the edge of the collar and the shoulder covers of orange red. A large orange red spot is also found on top.

The females of this species of moth lay their eggs on the black walnut or hickory trees in July, and the of August. The caterpillars feed on the leaves of black

hatched, and when fully grown attain the size represented in our engraving, measuring from five to six inches in length and nearly an inch in diameter.

The ground color of the caterpillar is green, with a pale blue band on each ring, and a large blue black spot is found on each side of the third ring. The most remarkable and attractive features of this caterpillar are its two rows of long, thorny horns or spines on the second and third rings of its body. The horns extend upward and are gracefully curved backward, being of an orange color, with black, pointed ends, and similarly colored minute thorns or projections throughout their length. The smaller black spines are formed on each ring. The great size of this insect and its long horns give it a wonderfully fine appearance when at rest, but when it is in motion, crawling along the twig of a tree and shaking its head and horns from side to side or moving them up and down, it becomes really frightful to behold, although it is perfectly harmless and cannot wound or sting with its horns or spines.

When through feeding, the caterpillar leaves the lofty branches of the tree and crawls down the trunk to the ground, and there searches for a convenient place to change into a chrysalis. In this restless state it is frequently found

ground to the depth of about six inches, and there builds a sort of nest or abode having a level bottom and an arched ceiling, both being nicely cemented the nest has walls which are impenetrable to other it strips off its skin, horns, jaws, and legs, and thus hard, black shell. In this state it apparently slumbers rawls through the ground to the surface. it reaches the latter, its wings are closely folded to its body and are in a moist, soft state, so that it looks more like a grub than a butterfly. In fifteen or twenty minutes, however, the wings are loosened from close contact with the body, and slowly expand until all the veins hardened, and the full imago is then ready to-rise and fly in the coming night to investigate the flowers and trees in the woods and fields and to hunt for a genial companion of its own species.

LIQUID SHOR POLISH.—Take of gum shellae 1/2 pound ounces and lamp black 2 ounces.

Beetles that Kill Trees.

The past summer has been one in which the caterpillar and a great variety of bugs and parasites have afflicted both the forest and fruit trees to an unusual extent in this part of the country, and our city parks even have been infested, notwithstanding the utmost vigilance is employed to destroy the pests on their first

The work of protecting the trees in Central Park from the ravages of insects has been for three years a regular department of the park, in charge of Prof. E. B. Southwick, the entomologist. The N. Y. Sun, from which we copy, says that he keeps at work a force of from two to a dozen men, according to the season, and says that encouraging progress is being made in driving out of the park the various insects that have been preying upon vegetation there, and have ruined many fine trees. Scores of infested trees have been cut down and burned, while great care is taken to prevent summer, even when they show no injuries from insect the insects from getting foothold in the newer growth.

The caterpillars, worms, and such conspicuous pests caterpillars make their appearance about the beginning are dealt with with comparative ease, but the most Fifth Avenue entrance to the park are a source of esreal damage is done by more insidious insects, such as pecial trouble. They have received a thorough wash-

tura produce, not eggs, but living young, which in ten or eleven days produce others, and so on, so that the original female in one summer may be the ancestor of twelve generations, and have one quintillion descend-


There are also insects that suck the life from the roots of trees, and borers that penetrate their hearts, besides any quantity of things with queer Latin names that in similar ways make life miserable for Professor Southwick and the trees in Central Park.

The usual method of treatment is to remove the insects by a wash and a scraping. Various washes have been tried, but a patent preparation, with, it is said, petroleum as a base, is now the only one used. After the tree has had a good wash with this it is scraped with stiff brushes of bristles, and sometimes of steel, until every trace of the insects is removed. Fine trees receive a precautionary wash frequently during the

The fine shade trees at the Fifty-ninth Street and walnut and hickory trees, on which the eggs are the bark lice. There are innumerable varieties of ing half a dozen times this season, the last one a few

days ago.

Through the country at large the extent of the damage done by insect parasites to trees and vegetation is not generally understood. One entomological sharp, who is spoken of as good authority, estimates the annual loss in the United States from this source at \$300,000,000. There is no portion of a plant or tree, from the root to the blossom, that has not its own peculiar pests. There are seventy-five different kinds of insects that prey on the apple trees, and nearly as many on the plum, peach, and cherry trees, while the grape vine has to withstand the attacks of fifty insect foes. The same number infest the oak. The elm has twenty, the walnut seventy, while the unfortunate pine has nearly a hundred. These are the figures of Dr. Packard, the standard authority on American insects. Prof. J. A. Lintner, New York State Entomologist, does much better for number. He has listed 176 different species that affect the apple tree alone.

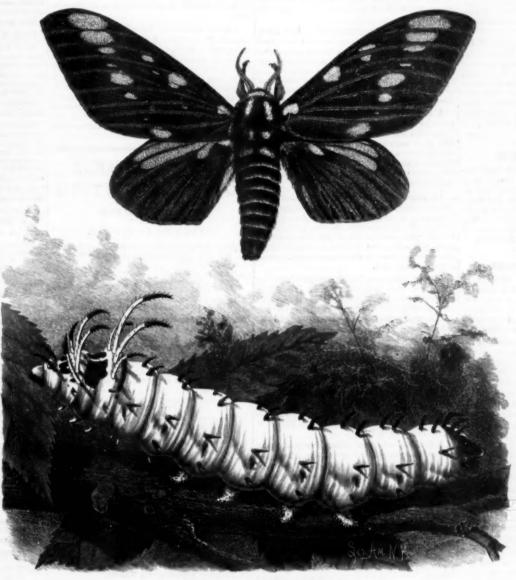

THE REGAL WALNUT MOTH.

the young bark, suck the sap. As they do this an exshell, beneath which they continue to live, and propawhole tree unless they are removed.

curious in that each separate insect, when scraped off, is a tiny gray scale, shaped and ribbed somewhat like an oyster shell. Nearly every sort of tree has a different sort of bark louse to prey upon it. The cochineal Central Park.

The scale is another insect of many species that infests shrubs and trees in the park. Its appearance and manner of work resembles that of the bark louse.

Plant lice are other pests of vegetation. The manner in which these insects multiply is marvelous. The should have taught him, a crop of inferior quality in and alcohol 8 quarts. Dissolve, and add camphor 11/2 original eggs are laid by the females in the autumn. every article grown and loss on his eight acres of problems and loss on his eight acres of problems. They hatch in the spring into wingless forms that in ably \$2,000 for that season.—National Stockman.

Manuring cannot be Overdone,

The venerable Peter Henderson thinks manuring cannot be overdone, and says: It is a great blunder to attempt to grow vegetable crops without the use of manures of the various kinds. I never yet saw soils of any kind that had borne a crop of vegetables that

crawling along a roadway or board walk. As soon these, but in general they are a tiny, almost invisible would produce as good a crop the next season without as it finds a convenient location, it goes into the insect, that pasture upon fresh twigs, and, penetrating the use of manure, no matter how rich the soil may be thought to be. An illustration of this came under my udation from their bodies builds up over them a hard observation last season. One of my neighbors, a market gardener of twenty years' experience, and whose with a secretion emitted by the caterpillar, so that gate so rapidly that in a short time whole branches are grounds have always been a perfect model of procovered with them, the hard shells lying together so ductiveness, had it in prospect to run a sixty foot insects and to moisture. After this grave is built thickly and irregularly that they seem the real bark of street through his grounds. Thinking his land suffithe tree, which actually is hidden beneath them. Once ciently rich to carry through a crop of cabbages withchanges into a short, thick chrysalis, having a tolerably they are fastened on a limb, these lice cannot move, out manure, he thought it useless to waste money by and to the naked eye show no signs of life, even when using guano on that portion on which the street was to throughout the winter, and about the middle of June they are scraped off with a knife. They quickly kill be, but on each side he sowed guano at the rate of it opens its shell and softens the cemented ceiling, and the branch they are on, however, and eventually the 12,000 pounds to the acre, and planted the whole with early cabbages. The effect was the most marked I ev The oyster shell bark louse is a common variety, and saw. That portion on which the guano had been used sold off readily at \$12 per hundred, or about \$1,400 per acre, both price and crop being more than the average; but the portion from which the guano had been withheld hardly averaged \$3 per hundred. The street eeare extended. They then become tightly stretched and insect is one kind of bark louse, but it does not grow in cupied fully an acre of ground, so that my friend actually lost over \$1,050 in crop by withholding \$60 for manure. Another neighbor, with a lease only one year to run, also unwisely concluded it would be foolish to waste manure on his last crop, and so planted and sowed all without. The result was, as his experience

ENGINEERING INVENTIONS.

A car door fastener has been patented by Mr. Eugene P. Hardin, of Lincoln, Neb. It con-ciats essentially of a catch, in connection with which is arranged a scaling attachment and a retaining block, the device being one which can be quickly applied, is cheap and durable, and will prevent any accidental opening of the door.

A car coupling has been patented by Mr. John Harding, Jr., of Wellington, Kaneas. The invention consists in the peculiar construction and arrangement of a hinge plate on top of the drawbar, and a weighted drop hinged to or near the front end of the plate and bearing a coupling pin, all combined with the drawbar, the device making an automatic coupling.

A steam trap has been patented by Mr. Samuel Bonser, of Dover, N. H. The head plat has a central aperture, above which a filter is held, and there is a divided cylinder having an annular chamber and an outlet, with tubular spindle, spindle cap, cylindric tube and connecting tube, with other novel features, making a simple device for discharging the water of condensation from steam heating or other

A device for preventing the explosion of boilers has been patented by Mr. Bendix Meyer, of Gleiwitz, Prussis, Germany. It consists of a plate or cover held on a packing surrounding the outlet steam pipe, a weighted rod or stem holding the cover or plate on the packing, while a stop prevents the plate or cover seating itself on the outlet pipe after the packing is removed or thrown out by the preseure of steam from the boiler.

A gas furnace has been patented by Mr. William W. Waplington, of West Middlesex, Pa. The invention is an improvement on a former patented invention of the same inventor, and provides for using practically all the internal surfaces of the flues for regenerative purposes, with a simple and inexpensive form of gas and air valves, being adapted for both natural and artificial gas, and providing special means for utilizing the heat usually wasted in the ash pit of

AGRICULTURAL INVENTION.

A cultivator attachment has been patented by Messrs. Edward Harriss and John N. Tiger, of Waverly, Neb. Combined with graduated and adjestable bars and a suspended shoe are standards carry-ing adjustable curved knives, making a simple attach ment for either a riding or waiking cultivator, whereby listed corn, corn in rows, or any vegetable planted in rows, may be expeditiously and effectively worked.

MISCELLANEOUS INVENTIONS.

A combined pencil holder and cigar cutter has been patented by Mr. Paul E. Gonon, of New York City. It consists of a tube with an aperture for the insertion of a pointed eigar end, a cutting tube to slide over the aperture, with spring held therein, and s pencil holder held in the other end of the tube.

A toy blow gun has been patented by Mr. Edward L. Evatt, of La Grangeville, N. Y. The invention covers an improved construction of a gun to be used as a child's toy, or as a blow gun for shooting a dart at a target, by applying the m end of the tube

An animal power, or tread machine, has been patented by Mr. Eli B. Studebaker, of Fredonia, Kansas. The invention covers novel features of construction and the combination of parts in a machine which may be readily adjusted to accommodate the strength of the animals working it and the desir power and speed of the machinery to be driven.

A process of refining gold and silver has en patented by Messrs. Darley C. Johnson and John P. Ryan, of Brooklyn, N. Y. It consists in placing the alloy of base and precious metals in a cupel, multing the alloy, and covering the surface with pulverized asbestos, with various other features, whereby the cost as well as the waste of refining will be decreased.

An improved bin has been patented by Mr. Holger C. E. Petersen, of New York City. It is designed to be of ornamental appearance, with a compact and substantially dust proof frame, from which the bin may be readily removed and cleaned, and wherein the weight is so distributed that the bin is easily turned upon its axis.

A combined saw jointer, saw set, and gauge has been patented by Mr. John H. Sodee, of Seattle, Washington Ter. It embraces a frame with a guide arm and stationary jaw, in combination with a sliding jaw and cam for operating it, the invention various novel parts and details and combinations of the same

A door attachment has been patented by Mr. William W. Allen, of East Pepperell, Mass. Combined with a latch and an extension thereon is a branch chain connected with the outer end of the ex-scissors, one of the levers being adapted to be rocked tension, a main chain fastened at both ends and held in a vertical plane, one having a test-receiving recess in an angular position by the branch chain, with other and the other a projection to fit therein, two of open position.

A coat adjuster has been patented by Mr. David H. Purves, of Waddington, N. Y. It is to enable aged, infirm, or sick people to easily put on overcosts or other garments without help, and consists of a rarment holder with a vertically movable clamp and ck, with a relatively stationary trip or releasing device to release the lock when the clamp and lock are moved upwardly.

A riding saddle has been patented by Peter J. Peffey, of Boise City, Idaho Ter. Comends, the cantle jockey having reduced ends and lips, with other novel features, whereby one or two girths may be used to accurately fit the saddle, the saddle being adapted to any shape horse and the change being

A carpet-stretching machine has been hatenied by Mr. Leonard Hinkle, of Kenton, Ohio. It has a toothed drawbar, with a head having an opening fitted over the bar, the lower part of the opening hav-ing a pawi-like edge to engage the lower teeth of the whar, with other novel features, making a stretcher which can be operated by one standing erect, and which will not injure the carpet.

A device for handling cans and bottles has been patented by Mr. David D. Brown, of Brooklyn, N. Y. It consists of a frame of novel construction with spring-held arms, lips for grasping necks of bottles, etc., and other novel features, whereby cans, bottles and similar goods may be readily and safely removed from shelves above the operator's head and as eafely

A cotton gin rib attachment has been patented by Mr. John E. Keily, of Marshallville, Ga. It is an efficient device for repairing the worn parts of gin ribs, thus saving the expense of new ones, and has brittle holder underneath the rib, that the saws pass through, which not only extinguishes any fire that may be generated, but cards the cotton and improves the

A nut lock has been patented by Mr. William Adair, of Leesville, Ohio. By this invention the plate itself is made the locking device, the nuts and the openings in the plate being so made that the latter locks the nuts when they are turned slightly backward on their bolts, the nuts being cut away at their inner corners, and the plates having slots of corresponding form and size.

A waterproofing compound has been patented by Mr. Ferdinand Kreutzer, of New York City. It is for use on leather and fabrics, and intended to render them soft and durable without injury to the material or acting upon the dyes, and consists of raw linseed oil, sinc vitriol, and fat soap, in specified proportions, and combined and cleared after a sp

A bale tie has been patented by Mr. Frederick T. Warburton, of Newport News, Va. bined with a buckle having a transverse alot with par-allel upper and lower sides are band sections having enlarged ends, the slot being wider than the combined thickness of the body of the band and one of its thick nds, but narrower than the combined thick both the ends.

An apparatus for wiping metal-coated en patented by Mr. Charles E. Matteson, of Easton, Pa. A circular pipe is held a short distance above a casing through which the wire passes, in combination with inwardly and downwardly projecting pipes, with other novel features, for wiping wire to ove the surplus metal and give it a smooth surface

A thill coupling has been patented by Mr. John W. Yous, of Mound City, Mo. The thill or pole fron has side lugs or trunnions arranged to enter a horizontal recess extending forward from the vertical recess of the axle clip, the parts being held together by a spring-carrying wedge, thus dispensing with the use of bolts and the ordinary form of rubber anti-rattler.

A neck yoke has been patented by Mr. Fred F. Wheeler, of Ocheyedan, Iowa. It is so made that, should the tugs become detached, the yoke will not be slid off the pole by the forward motion of the horses, while it will revolve free horizontally or laterally upon the pole, yet action in the direction of the longitudinal axis of the pole will be limited by the forward or rearward throw of the yoke.

A process of producing designs upon celluloid has been patented by Mr. Albert Le Roy, of Paris, France. It consists in first printing the design upon any suitable material, then damping and applying upon a celluloid sheet and subjecting both to pressure between hollow steam-heated plates, thus fixing the design permanently upon the celluloid by the simul-taneous influence of heat, pressure, and steam.

An automatic fan has been patented by Mr. Charles E. Pierce, of New York City. An oscillating shaft bears a pinion which engages with the egmental gear of an escapement, the motor being ither a spring or a weight, and the shaft operating a vibrating arm to which a fan is attached, making a nient device for driving away flies, cooling rooms

A clamp has been patented by Mr. Frederick F. Houston, of Chicago, Ill. The clamp head has a thrust block and follower with opposing inclined faces, opposite wedge blocks being fitted be-tween them, with means for drawing one of the wedge blocks toward the other, with a cam lever fitted to the thrust block adapted to bind the latter to a timber, the device being specially adapted for holding work while gluing or otherwise joining the parts.

A cow milker has been patented by Mr. Philip M. Hobbe, of Wymore, Neb. It consists of two hand levers somewhat in the form of a pair of scissors, one of the levers being adapted to be rocked milkers being need at the same time, one grasned by ach hand, and two teats being operated ach device

A saw gummer has been patented by Mr. ewis J. Grant, of Lamont, Mich. It com frame with a handle and spring carrying a punch block, combined with a handle having a head with bearings on the under side of the die frame, and an arm secured to the die bleck and having its lower end connected to a pin secured eccentrically in the head, with other novel features, the device being very handy, and always ready

A grain car door has been patented by Mr. William T. Spillane, of Casselton, Dakota Ter. The door-supporting frame is mounted upon a horizontal way, and a vertically adjustable door is carried by the frame, the parts being so arranged that the door may be raised to rest within the frame, and the frame

and door moved to one side to clear the doorway, the device being a substitute for the ordinary detachable

A glass beveling machine has been patented by Mr. Thomas P. Gilroy, of New York City. Combined with a grinding wheel having a swinging frame is a revolving shaft mounted therein carrying the glass disk to be beveled, and a screw-threaded spindle eagaging with a gear wheel nut actuated by a hand wheel for raising or lowering the frame, with other lovel features, making a simple, durable, and effective

A sash fastener has been patented by Mr. William R. Abrams, of Ellensburg, Washington Ter. The invention covers a novel construction and combination of parts, in connection with a dog journaled in the casing, whereby the edge of the window will be engaged at any point, and effectually prevent the upper sash from being drawn down or the lower ash from being raised, and not interfere with the operation of either sash in an opposite position

An automatic chuck for all kinds of brass work, such as steam, water, clock, and watch works, has been patented by Mr. Patrick J. Cahill, of Leeds, Mass. It is to take the place of spring chucks, and will grip from the smallest holds up to five tons without friction, being very economical. It has a sliding chuck head operated by hand or treadle, with springs for opening and closing the jaws, and four of them have been working for the past year in the works of the Haydenville Manufacturing Co., Haydenville,

A dress guard for vehicles has been patented by Mr. Charles L. B. Martin, of Montclair, N. J. It is a folding shield, which may be placed over that portion of the wheel against which a lady's dress is liable to drag in getting in or out of a carriage, and is in the form of two circular troughs, formed of back and side pieces, preferably of leather, united by links, and with a hook which may be adjusted to bear against the rear face of one of the spokes and hold the shield in place. This shield prevents the soiling of the garnts on the wheel, and when not in use may be folded and kept beneath the seat.

SCIENTIFIC AMERICAN BUILDING EDITION.

OCTOBER NUMBER.

TABLE OF CONTENTS.

- Elegant Plate in Colors of a Residence of morate cost, with floor plans, specifications, stoof details, etc.
- Plate in colors of a Country Store and Flat, with specifications, floor plans, sheet of de-tails, etc.
- Design of a one-story Southern Residence, with floor plan. Cost, Five Thousand Dollars.
- 4. Perspective and floor plans for Dwelling for a narrow lot. Cost, Thirty-five Hundred Dol-lars.
- Illustration of a two-story and attic Dwelling erected at Arlington, N. J., with floor plans. Cost, Two Thousand Eight Hundred Dollars.
- 6. Drawing in perspective, with floor plans, of a Double House of moderate cost. A pleasing design
- A Twelve Hundred and Fifty Dollar two-story attic House. Perspective and floor plans.
- Perspective drawing, with a floor plan, of House at Flushing, N. Y. A comfortable an substantial dwelling, costing about Eigh Thousand Dollars.
- View of the new United States Court House and Post Office at San Antonio, Texas.
- Handsome design of a new Dry Goods Store erected at Winona, Minn.
- Illustrations of small sea-side Cottages at Lion-Sur-Mer, Department of Calvados, France.
- Page engraving showing Main Entrance Gate, Chateau at Bougival. M. Pasquier, Architect.
- Views of a Church at La Capelle, France. M. Charles Garnier, Architect.
- New Church at Stratton, in Hampshire, England. 15. Design of a Sideboard in Walnut.
- New Exhibition Building of glass and iron, at Madrid. Half page engraving. 17. Villa St. George's, at Saint Lo. Half page en-
- Δ City Residence in Mannheim. Werle & Hartmann, Architects.
 - mann, Architects.

 Miscellaneous Contents: Cost of Brick and Brickwork.—United States Mail Chutes for Interiors of Buildings, illustrated.—An Improved Saw Filing Machine, filustrated.—Improved Device for Working Window Shuttersilustrated.—Drawing and Engineering Instruments.—Tests of Portland Cement.—Painting Hrick and Stone Buildings.—Frosted Glass.—Action of Frost on Coments.—Oil of Bay for Files.—Decorative Novelties.—Colored Mortar for Brickwork.—How to Clean and Polish Top Leather Screens.—Blinds.—To Transfer Prints to Wood.—Rules for Gas Fitting.—Bichoride of Mercury as a Disinfectant.—Chinese Brickmaking.—The Long Leaf Pine.—New Galvanizing Process.—Earthquake Foundations.—Care in respect to Fire.—Healthy Habitations nizing Process.—Earthquake Foundations.— Care in respect to Fire.—Healthy Habitations and Defective House Construction.—The Effect of Sea Water on Concrete.—Vassar College Sewerage.—Preservation of Stone.—Improved Surface Planing Machine, illustrated.—The "Auburn" Boiler for Steam Heating and the Woodcock Patent Shaking Grate, with illustrations.—Ebonizing.—Design in Architecture.

The Scientific American Architecture. The Scientific American Architects and Builders Edition is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid Magazine of Abchitectura, richly adorned with elegant plates in colors and with fine engravings, filustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Hichness, Cheapness, and Convenience of this work have won for it the Largest Circulation of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Magic Lanterns and Stereopticons of all kinds and prices. Views illustrating every subject for public exhibitions, Sunday schools, colleges, and home entertainment. 152 page illustrated catalogue free. McAllister, Manufacturing Optician, 49 Nassau St., New York.

No. 11 planer and matcher. All kinds of woodworking achinery. C. B. Rogers & Co., Norwich, Conn.

I want my patent, 314,351, on hobby horse, manufactured and brought in market. State best terms, and working model will be sent. Wm. Spitsnass, New Athens, Ill.

Steam jacket feed water boiler and purifier. New catalogue free. Wm. Baragwanath & Son, 40 W. Division St.,

For the latest improved diamond prospecting drills. address the M. C. Bullock Mfg. Co., 136 Jackson St., Chicago, Ill.

The Railroad Gazette, handsomely illustrated, published weekly, at 73 Broadway, New York. Specimen copies free. Send for catalogue of railroad books.

The Knowies Steam Pump Works, 113 Federal St., Boston, and 98 Liberty St., New York, have just is sued a new catalogue, in which are many new proved forms of Pumping Machinery of the sir duplex, steam and power type. This catalogue mailed free of charge on application.

Link Belting and Wheels. Link Belt M. Co., Chicago Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Nickel Plating.-Sole manufacturers cast nickel an odes, pure nickel salts, polishing compositions, etc. \$100
"Little Wonder." A perfect Electro Plating Machine.
Sole manufacturers of the new Dip Lacquer Kristaline.
Complete outfit for plating, etc. Hanson, Van Winkle &
Co., Newark, N. J., and 22 and 24 Liberty St., New York.

Iron Planer, Lathe, Drill, and other machine tools of nodern design. New Haven Mfg. Co., New Haven, Conn. Supplement Catalogue.-Persons in pursuit of information of any special engineering, mechanical, or scien-tific subject, can have catalogue of contents of the Sci-ENTIFIC AMERICAN SUPPLEMENT sent to them free The SUPPLEMENT contains lengthy articles embracing the whole range of engineering, mechanics, and physical science. Address Munn & Co., Publishers, New York.

For best leather belting and lace leather, including Hercules, see Page Belting Co.'s adv., p. 172.

Curtis Pressure Regulator and Steam Trap. See p. 157. Iron, Steel, and Copper Drop Forgings of every decription. Billings & Spencer Co., Hartford, Conn.

New Portable & Stationary Centering Chucks for rapid entering. Price list free. Cushman Chuck Co., Hartford.

Steam Hammers, Improved Hydraulic Jacks, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

60,000 Emerson's 1887 Feb. Book of superior saws, with upplement, sent free to all Sawyers and Lumbermen. ddress Emerson, Smith & Co., Limited, Beaver Falls, Address Eme Pa., U. S. A.

Safety Elevators, steam and belt power; quick and nooth. D. Frisbie & Co., 112 Liberty St., New York.

"How to Keep Boilers Clean." Send your address for free 86 page book. Jas. C. Hotchkiss, 130 Liberty St.,

The Holly Manufacturing Co., of Lockport, N. Y., will send their pamphlet, describing water works ma-chinery, and containing reports of tests, on application. Durrell's imp. nut tapper. Taps 1/2 to 2 in. New imp. celt cutter. Howard Bros., Iron Works, Fredonis, N. V.

Putest Rights for Sole. Apparatus for boilding Concrete Buildings and Walls. County rights, \$50. State rights, \$500. See descriptive notice in SCI. AMERICAN, May 22, 1886. Send for circulars. Ransome, 402 Mont-gomery St., San Francisco, Cal.

Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Send for new and complete catalogue of Scientific Books for sale by Munn & Co., 361 Broadway, N. Y. Free

NEW BOOKS AND PUBLICATIONS.

SCIENTIFIC HORSESHOEING. By liam Russell. Cincinnati: F liam Russell. Cincinnati : Clarke & Co. Pp. xxv., 211.

This book intelligently considers, anatomically and ractically, the question of the proper shoeing of horses, and affords a great deal of information which it would be well for all owners of horses to be possessed of. The author has for many years had a high reputation as a successful horseshoer, and in this book points out many of the errors existing where horseshoeing is done by those ignorant of their business or careless in its performance, and the great evils which result therefrom. The book has numerous illustrations explanatory of the structure and functions of the horse's foot, and showing the effects of good and bad shoeing.

WILSON'S QUARTER CENTURY IN PHO-TOGRAPHY. By Edward L. Wilson. New York. 1887. Edward L. Wil-son. Pp. 528.

In this work we have an admirable body graphic information. From notes published at various times by some three hundred leading authorities, ama teur and professional, a running series of foot notes is composed. Above these, and serving as the basis for their imparted character of commentary, comes the text, rather less in extent than the notes. The whole forms an exceedingly attractive olla-podrids of notes and observations. Illustrations of all sorts of devices and assistances in photography are given in liberal profusion. The text is a consecutive and valuable treatise by itself. The notes are made up of selections from the Philadelphia Photographer. The author and ditor of the work speaks of it as an anniversary publication for himself, he, twenty-five years ago, having entered a photographic establishment as employe. This volume commemorates his devotion of a quarter of a century to his art. From what has been said of the scheme of the book, it is evident that a review is imposepon its merits.

POOR'S MANUAL OF RAILROADS, 1887.

Twentieth annual number.

New
York: H. V. & H. W. Poor.

Xliii., 1053. \$6.

To any one interested to understand the details of the business of the United States, the financial porailroad ousseless and the various pro-sition of the different companies and the various pro-perties, this book is simply invaluable. During the twenty years since the first edition was published, each successive volume has represented a larger and larger mass of more carefully compiled statistics, much being from the sworn statements of railway officials, giving the work a high standing as an authoritative record in a field in which it has no competitors. From the sum-mary statement in the introduction, it appears that there are now employed by all the railroads 26,415 locomotives, 19,252 passenger cars, 6,325 baggage and mail cars, and 845,914 freight cars, and that of a total of 168,047 miles of track, 105,723 miles are now laid with The net earnings on all the capital inrested is placed at not quite 3% per cent for the last

Poor's Directory of Railway Offi-Cials, New York: H. V. & H. W. Poor. Pp. xliii., 373. \$2.

This is properly a supplement to the Manual, bringing within convenient compass the names of all offi-cials desirable to know, for business purposes, to the number of some 30,000, including the names of officers of street and lumber railways as well as steam railways, express and sleeping car companies, and manufacturers of railway supplies.

The Curio is the title of a new illustrated magazine, commenced by R. W. Wright, of No. 6 Astor Place, New York. It is in quarto form, handsomely printed, and intended to satisfy the tastes and set forth the possessions of collectors of the rare and curious in the departments of genealogy and biography, heraldry and book plates, coins and autographs, rare ooks and works of art, old furniture and plate, and other colonial relics. The first number is handsomely embellished with valuable illustrations.

The Machinery of Small Boats for Ships of War, etc., a paper read before the Institution of British Naval Architects, by A. Spyer, presented on application by Fred. M. Wheeler, 25 Liberty Street, N. Y.



HINTS TO CORRESPONDENTS

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.

Special Written Huformation on matters of personal rather than general interest cannot be expected without remneration.

scientific American Supplements referred to may be had at the office. Price 10 cents each. Books referred to promptly supplied on receipt of

Minerals sent for examination should be distinctly marked or labeled.

(1) A. F. M. desires a recipe for making a good thin shellac varnish. A. Break the gum into small pieces and macerate in a stoppered bottle with ether. After swelling up sufficiently, the excess of ether is poured off, when the shellac will dissolve quite readily

(2) H. S. W. desires a receipt for the cure of warts, one that will remove them permanently. Also please give me the cause of warts. A. Their caus certain; they are said to be caused by uncleanli-Their removal is easiest effected by means of caustics, such as silver nitrate, nitric acid, or aromatic

(3) A. F. S. asks (1) a good receipt for making hektograph ink, both purple, blue, and black. A. Take 1 part aniline of desired color, dissolve in rts water and add 1 part glycerine, 2. The cause of the glass plates cracking in the Wimshurst electric machine? A. The trouble may be in the clamping—the flanges may not fit, or may not be properly packed. For electrical supplies, address any of the makers of or dealers in such goods advertising in our

(4) G. F. D. writes: I have been troubled of late with what is generally termed sour stomach, and have been taking a third of a teaspoon of saleratus or thereabout, to overcome the acidity. Is that a proper corrective? A. You had better take a cup of clear warm water an hour before meals, and occasionally a bottle of citrate of magnesia to clear the stomach, with good habits and plenty of exercise. See and cure, in Scientific American Supplement, Nos. as to suit the 328, 129, 215.

(5) H. G. asks a recipe for a good paint or stain for patterns for castings. A. Shellac varhish alone or with lampblack or vermillon is in ordinary use for varnishing patterns. Methylic or wood cohol is the best solvent of shellac for making the varnish. Shellac varnish may also be purchased through the paint trade.

(6) J. McD. asks: 1. Is there really a fourth state of matter, known as radiant matter? A. The question is yet undec.ded. It is safest to conclude that there is probably no fourth state of matter. 2. Does all ice ma aintain a fixed temperature or degree of north pole and brought to North Carolina be of same

sible. To get at the full scope, the book itself should be consulted, and we recommend it to all photographers can be of all degrees of temperature below 32° Fab.

The fixed point of temperature is its melting point. This is always 32° Fah.

> (7) P. H., Jr., asks: 1. Will a siphon draw water through 2,400 feet of 134 inch pipe with a rise of 20 feet and a fall of 80 feet? A. Yes; but it requires care in filling or charging, to free every part from air, and an air chamber at the apex to prevent a break in the flow by accumulation of air which is libe rated by the partial vacuum. Lower end should be immersed or turned up to prevent air drawing into the end, if the slope is steep. 2. A receipt for roof paint for corrugated iron roofing. A. Use pulverized oxides of iron, as yellow and red iron ochers, tite iron ores finely ground, and simply mixed with linseed oil and a drier.

(8) F. H. S. asks: What is the best battery for running a small electric turntable for show windows? How is the battery made? I have a plunge battery of ten cells carbon and zinc plates in electro fluid. Would this be suitable to run the above or a small electric lamp, or would it soon run out? A. For the above purposes a Bunsen battery is perhaps the best. For description of this and other forms, see our SUPPLEMENT, Nos. 157, 158, and 159. The plunge battery, however, is very serviceable.

(9) G. A. M.-Rule for surface of oblate spheroid: Square their diameters, and multiply square root of half their sum by 3'1416 and this product by the

 $d^3 + d'^3 \times 3.1416 \times d'$

For prolate spheroid: As above by inserting conjugate eter in place of transverse. The other formulæ asked for involve conditions in mathematical astronomy too complicated for this column.

(10) J. W. D. L.-The expenditures of the German government last year, including cost of army and navy and ordinary expenses of the empire, were \$174,153,877. The general cost of the United were \$174,153,877. The general States government was \$242,483,188. Any such comparison, however, would be greatly misleading with out counting the expenses of the several States, which in Germany have to support their army contingents, which is not the case here. Prussia, for instance, has a total expenditure of \$324,868,000, Bavaria \$60,000,000, Baden \$41,000,000, etc. Our State governments are expensive, but paying for a large special army contingent ach does not figure in such expe

(11) P. L. asks: What is the proper mposition of the metal in a safety plug for a boiler, and at what temperature does it melt? A. We have no record of the composition used by various parties advertising the sale of fusible plugs. The following alloys, with their corresponding melting points, together with the temperature of steam at various pressures, may be found useful:

- 2 S .

Tin		Lead	1 1			881° 878°	F.	Stear pressu by gau	Temp	
5.6	4	16	1			3659	64	120 lb.	3500	F.
8.6	8	95	1			356°	68	105 lb.	3410	6.6
49	2	9.9	1			3409	++	90 lb.	8310	45
69	156	66	1			3349	-66	75 lb.	3300	64
44	4		4	Bismuth	1	330°	0.0	60 lb.	307°	0-0
0.5	8	8.5	3	6.9	1	3100	10	45 lb.	2820	66
+8	22	8-5	2	fin .	1	2902	19	30 lb.	2740	44
44	1	64	1	4.6	1	2549	15	15 lb.	2500	44

So much depends, however, on the way in which an alloy is made, the purity of its original metals, and the changing conditions to which a fusible plug is subjected, that it is very doubtful whether they should ever be depended upon in critical places,

(12) Jones asks how to use glucose in making pop corn balls. A. We know of nothing better for making pop corn balls than molasses boiled until stringy and then rolling the corn in it. Glucose is decidedly inferior,

(13) G. S. asks the best way to mix ime whitewash for outside work. A. Take a clean, water-tight barrel and put into it % bushel lime. Slake it by pouring boiling water over it and in sufficient quantity to cover it 5 inches deep, stirring it briskly till thoroughly slaked. When slaking has been effected, dissolve in water and add 2 pounds sulphate of inc and one of common salt.

(14) W. L. F.-There are several receipts for making the black color on brass: 1. 5 drachms ni trate of iron, 1 pint water. 2, 5 drachms perchloride of iron, 1 pint of water. 3. A solution of chloride of platinum in water.

(15) R. K. B.-The curvature of the earth is such that a straight line a mile in length would be 204 inches from the surface at either end. line were two miles long, either end would be 8 004 inches from the surface. The measures are found by determining the tangent of the circle of the earth's

(16) J. E. N.-The cultivation of the tree that yields annotto would not prove profitable, as the demand for the product is too limited. It is used chiefly for coloring butter and cheese. Messrs. W. H. Schieffelin & Co., 170 William Street, New York, and all other large drug houses import it in quantities such our Consul-General in Brazil is H. C. Armstrong, Rio de Janeiro

(17) J. S. asks if there is any simple and reliable method of testing a 12 horse po at 100 pounds water pressure. The said boiler is situated in a part of India where no government test is procura-ble, and it cannot be sent to any boiler works. What apparatus is necessary for the purpose? A. We know of no safe way of testing the boiler except by improvising a pump, no matter how small. A common plumber's force pump is sufficient. Fill the boiler full of water by any convenient means, through the safety valve or otherwise. Use the pressure gauge attached to the hoiler, if you think it is correct. cold? In other words, would lee frozen at or near safety valve weight at 100 pounds by its mark. Then pump water in by any means at hand. It takes but very

little water to run the gauge up to 100 pounds after the boiler has been filled. If you have a steam pump at-tached to the boiler, a lever may be arranged to work the pump a few strokes for the required pressure. The engine in the absence of all pumping appliances may be made to put pressure upon the boiler by pulling i backward and pouring water into the exhaust, but this should be managed cautiously. With proper precautions the following method may be used. Fill the boiler with water, leaving absolutely no air space. It must be solid water. Then by slowly firing, the pressure can be run up to any desired amount. The instant the pressure is reached, or an instant before, draw the fire. This should only be done by an experienced engin

(18) A. M. H. asks directions for making to paint pipes and radiators for steam heating. A. A little clear japan varnish mixed with ordinray colors makes a very good cheap paint for radiators. The regular japan varnishes in colors are used for fine work. This requires to be baked in an oven at 250°, and makes a permanent color. Sometimes ordinary colors in oil are used. When dry, varnish with copal.

(19) B. F. B.-Hard solder is generally ade of brass of a lower grade than the work to be brazed. For brazing the ordinary commercial brass, use the same kind of brass, melting in a crucible and adding 20 per cent of zinc. For brazing iron, use copper or ordinary brass. Flux with borax.

(20) P. A. asks: Which is the bestpiston or a rotary fire engine? A. Both are manufac turned and in use. The piston engine and pump are preferred by the New York fire department.

(21) J. H. L.-Fulminate of gold exlodes by slight increase in heat caused by comprebut is exceedingly uncertain and dangerous. minate of platinum is next safer and explodes at a temperature of 400° Fah. Both the above are very violent and explode with the slightest blow. Pure fulminate of mercury is very quickly and easily exploded. It is mixed with potassium nitrate or chlorate to moderate its violence, when used for charging gun caps

(22) J. M. C. writes: In "Haswell," issue of 1884, on page 480, he says, the evaporative power of one pound of anthracite coal is 7.05 to 9.05 pounds of fresh water. Through how many degrees is this water supposed to be raised? A. The note referred to in 'Haswell" is only an average or generalization of evaporative effect from mean temperature or 60°. ultimate evaporative effect of the best coal, less the ash, is 14°9 pounds from water at temperature of 212° without pressure. When tests are made under pressure, the evaporative effect is reduced to and from 2129 temperature without pressure. Thus the best forms of boilers doing low duty may run up to 12 pounds per pound of coal, and even higher than this is claimed with regenerative furnaces. The quality of coal varies greatly, as well as the condition of boilers. You will also find in "Haswell" interesting tables of the effective value of different kinds of coal. A large percentage of boilers in use are evaporating 5 pounds and under per pound of coal. Incrustation dirty fines or tubes and overwork small boiler duty. main features of

(23) R. B. says: I am going to build a small steam engine 3 inches bore and 5 inches stroke what is the rule in plain figures to get at the power? A. For small engines of uncertain cut off multiply the area of the cylinder by four-fifths the steam pressure and this product by the travel of the piston in feet per minute, Divide last product by 33,000 for the horse power. 2. What size boiler shall I need to get one-half horse power from this engine? A. Your boiler should contain for a half horse power 8 square feet of surface exposed to the fire. 3. What size boiler should I need to run it at its fullest capacity? A. Your engine is equal to 4 horse power at 200 revolutions per min pounds steam pressure. For this you will need a 5 rse power boiler er one containing 70 square feet of fire surface. 4. What is the rule to get at the power of inclosed water wheels or turbine? A. Turbines give from 75 to 80 per cent of the value of the water i The value of the water flow is the volume falling I foot per minute multiplied by the weight of a cubic foot. For the horse power, divide the above product by 33,000.

(24) M. asks the best method of gluing mery on wheels and belts. A. Use the best emery and good tough glue made thick. Brush the glue on rather thick and follow the brush at once with the emery from the hand or a small piece of wire cloth soldered to the edge of a small shovel, so as to distribute the emery readily. Use the flat hand to press the emery close. A small flat piece of wood may also be used to

(25) A. L. G. asks: 1. What is the best for polishing bright iron work, such as cylinder heads and guides? A. Polish bright iron work with rotten-stone and oil, if it is running machinery. Work not liable to have its running parts injured by emery, may be polished with emery cloth or flour emery and oil, as it is a quick way. You may polish the cylinder head with emery, but not the slides of an engine. Tripoli and oil makes a high finish after the emery. 2. What is best for polishing Russia iron? A. Russia iron should only be wiped clean with oil. The black surface will come off if polished with abrading material.

MINERALS, ETC.—Specimens have been received from the following correspondents, and have been examined with results stated.

ge drug houses import it in quantities such a demands of their trade,—The address of ore, and is of value only if in sufficient quantity and A. D. G.-The material sent is sand containing iron purity to smelt economically, which is very seldom the case.

TO INVENTORS.

An experience of forty years, and the preparation of An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or invited to write to this office for prices, abroad, are low, in accordance with the times and our ex-tensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 561 Broad-

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

September 27, 1887,

AND EACH BEARING THAT DATE.	
AND EACH BEARING THAT DATE.	
[See note at end of list about copies of these patents.]	
Adding machine, S. E. Austin 370,719	
Adjustable wrench, C. M. Brown	
& Oester. 370,540 Air compressing apparatus, L. S. Chichester. 370,576	
Air purifier and evaporator, J. W. Collins 370,529 Alarm. See Burgiar alarm.	
Alarm lock, Bradeby & Hagee	
Animal power, E. B. Studebaker	
Anti-incrustation compound, W. J. Williams 370,583 Area, floor, roof, and sidewalk construction, P. H.	
Jackson	
Axle box, car, G. M. Brill	
Bags, See Tobacco bag. Bags, machine for making satchel bottom or	
square bottom, W. Liddell	
Bale tie, F. T. Warburton	
Baling press, S. J. Webb	
Baling sawdust, machine for, C. E. Mitchell 376,486 Bali grounds and tennis courts, device for laying	
off base, B. E. Allen	
Banker's safety express box, C. R. Arnold 370,671 Bar. See Yoke bar.	
Barrel package, half, Marvil & Robinson	
Bed, folding, A. Stark	
Bicycle, G. M. Collicutt	
Board. See Drawing board. Game board.	
Boiler. See Steam boiler. Boilers, device for preventing the explosion of, B.	
Meyer	
Book attachment, A. Bieber	
Boot, waterproof, L. Siessinger	
W. Crooker	
Box. See Axle box. Banker's nafety express box. Cake and bread box. Journal box. Pa-	
per box. Water closet service box. Bracket. See Fence bracket.	
Breastpin, H. P. Prain	
Brick mould sanding machine, H. & G. Martin 370,635 Bridge gate, swing, M. Wheeler	
Bridge guard, W. C. Newman	
Brush band, S. A. Verbryck	
Buckle, J. C. Hyde	
Buckle, suspender, D. L. Smith	
Burner. See Lamp burner. Vapor and steam burner.	
Bust form, E. Case	
Button, N. Mitchell 370,480 Button for dress trimmings, C. Seel 376,419	
Cabie road curve, D. Devlie	
Cake or bread box, C. Forster	
T. H. Blair	
Candle, lamp, F. F. Schmitt	
Car brake, J. D. Stovail	
Car coupling, H. Hadden	
Car coupling, M. Phillips	
Car door, T. Z. Roraback. S70,712 Car door fustener, E. F. Hardin. S70,889	
Car door, freight, F. G. Susemihl. 370,502 Car door, grain, W. T. Spillane. 370,506	
Car, dumping, F. Peteler. 570,651 Car, freight, A. O. Baldwin 570,720	
Car retracker, W. H. Murdoch	
Car seat, J. A. Brill	
ar ventilator, railway, J. C. Wands	
Cars, metallic roofing for railway, Caldwell & Peterson	
Cars, pipe coupling for railway, J. H. Chambers 370,006 Cars, safety brake for cable, L. Goddu 370,368	
arbon dioxide, apparatus for obtaining liquid, D. D. Johnson	
arpet sweeper, W. J. Drew	
ase. See Ticket case. ash carrier, D. Kahnweller 370,627	
ash received, apparatus for checking and record-	
ing, 8. Firth	
elluloid, producing designs upon, A. Le Roy 570,546 enterboard wells, calking the seams of, A. F.	
Stubbs	
hair. See Child's chair. heck, baguage, H. A. Deraismes	
hild's chair, J. A. Crandali	
hopper. See Stalk or weed chopper. hronometers, thermometer attachment for	
ships', T. C. McLean	
gar mould press, H. K. Weaver	
E. Thomson	

Clar, apparatus for preparing, W. Mendham..... 370,563

ratus for splitting, R. R. Von Wal-

Cleaner. See Pen cleaner.

Coal, etc., app

252	Scientific,
Cottin protector, Pilert & Brown	Metal beams or bars, device for bending, Z. P.
Collar, horse, B. H. Helming Edule	Boyer
Comb. See Curry comb. Combs, manufacture of, H. G. Guild	Mill. See Rolling mill.
Cooker, steam, A. M. Amos	J. J. Hooker
Corn remover, E. J. Haendler	Mortar, machine for mixing, Landvoigt & Fen-
Coupling. See Car coupling. Shaft coupling. Thill coupling. Whiffletree coupling.	Wick
Cultivator attachment, J. E. Keily	Mowing and reaping machines, cutter bar for, P. E. Shee
Cup. See Pen cleaner sponge cup.	Mowing machine knives, machine for grinding, J. Rogers
Curry comb, M. Sweet	Musical instrument, mechanical, M. Gally 850,460
Cutter head, J. C. Humphreys	Musical walking stick, M. Seliger
Dental articulator, S. Arnold	Nest for fowls, C. C. Pierce
Dental illuminating apparatus, T. G. Lewis	Net, horse, J. Hand
Digger. See Post hole digger. Tree digger.	Nut lock, J. F. Duff
Ditching machine, Ballard & Fisher	Nut lock, F. Redmond
Door spring and check, Griffing & Ashborn	Ordnance, breech-loading, G. Quick
Dumping apparatus, G. H. Hulett	Padlock for trunks, etc., L. Hillebrand
Dust collector, J. M. Finch	Pan. Poultice pan. Paper bag holder, W. A. Simmons
Egg beater and mixer, D. Peters	Paper box, J. Jezalík 370,481
Electrical distribution, system of, F. A. Wessel 370,436 Electro-poeumatic brake systems, coupling for, J.	Paper box, A. C. Jordan
F. Carpenter	Pen cleaner sponge cup, S. Darling
Extractor. See Cork extractor. Fabrics, machine for brushing, E. & J. McCreary. \$70,999	Pencil holder and cigar cutter, combined, P. E. Gonon
Fan, automatic, C. E. Pierce	Pencil, lead, P. E. Wirt 370,438
Fan, blast or exhaust, M. Gregg	Permutation lock, A. Stoner
Feed mechanism, stop device for intermittent, W. Koch	Photographic camera shutter, R. E. M. Bain 370,673 Piano, method of and apparatus for learning to
Fence, P. R. Hine	play on the, V. Von Wedelstaedt 370,750
Fence, E. R. Powell	Pie turner, G. H. Thomas
Fence bracket, wire, W. C. Gholson	Pipe wrench, J. H. Guiley 870,752 Planter, corn, J. D. Baer 270,595
Wintrode	Planter, corn, J. W. Thomas
works, obtaining, G. L. Wigg et al 370,511	Plaster of paris or other composition or materials,
Fiber extracting machine, J. Hemphill	manufacture of articles from, H. Ordenstein 870,645 Post hole digger, G. H. Johnson
Fifth wheel, D. D. Whitney	Post hole digger, J. C. Wygant
Pilter press for use in producing homogeneous	Power. See Animal power. Press. See Baling press. Cigar mould press. Fil-
cakes, J. Kroog. 570,742	ter press. Propeller, screw, Steves & Hill
J. Kroog \$70,741	Protector. See Coffin protector.
Fire escape, W. Cluse	Pruning hook, J. M. King
Fire extinguishers, fusible link for automatic, O. B. Hail	Pump, H. A. Noble
Fish trap and feeding pen, E. W. Jenkine	Pump, D. L. Volker
Fortification for coast and harbor defense, T. L.	Rack. See Hay rack.
Furnace. See Gas furnace. Hot air furnace.	Rack and pinion device, Mathias & Walkup 370,709 Railway cross tie, Mahoney & Shockley 370,614
Tire heating furnace. Furnace, R. O. Benton	Railway crossing, E. Fontaine
Furniture nail, T. F. N. Finch 870,614	Railway switch, M. B. Mills 370,642
Game beard, W. F. Kelly	Railway switch and signal operating mechanism, C. S. Drake
Gas pressure regulator and cut-off, J. R. Smith \$70,715 Gas regulator, J. H. Helm 370,619	Railway wheel, T. R. Crampton
Gas supply system, G. Westinghouse, Jr	Goodwin
Gate, M. B. Mills 370,643	Razor, safety, J. Turner
Glove, J. Kaysor	Ranors, die for forging, J. Turner
Grader, road, Adams & Pennock	Reel, E. S. Hunt
Grate, W. B. Dunning	Refrigerator, J. L. Gray
Guard. See Bridge guard. Spool guard.	Regulator. See Gas regulator. Gas pressure regu- lator. Speed regulator.
Gnn, breech-loading, Jones & Taylor	Reservoir or tank, D. W. Brown
Handle. See Ladle or dipper hendle. Sunshade handle.	Resins, hardening, J. B. Melvin
Harrow, R. Yerington	Rolling mill, J. McIlvried
Harvester, C. Clapp 370,609	Rolling mill plant, C. R. Beach
Harvesters, folding platform for, S. F. Voorhees 339,339 Hurvesters, pan or tray for berry, J. Benedict 339,338	Rotary engine, L. Brown, Sr
Harvester, grain, C. Clapp	Safes and vaults, operating mechanism for the doors of, H. Gross
Hay rack, W. D. Miller	Sash cord guide, S. Paimer 370,647 Sash fastener, Bigus & Pardoe 370,526
heater. Heating apparatus, D. A. Arnold	Sash fastener, A. Rippien 370,560
Holder. See Camera plate holder. Hat holder.	Saw bindes, machine for straightening, tempering, and flattening band, J. E. Emerson 870,689
Label holder. Paper bag holder. Pencil holder.	Saw gummer, L. J. Grant
Hook. See Pruning hook. Horseshoe calk machine, M. R. Murray 370,745	Sodee
Hot air furnace, A. C. Patton 370,649	Screens, slide for extension, E. N. Porter 370,654
Indicator. See Station indicator. Ingots, manufacture of structural, E. Wheeler 250,12	Screwdriver or drill, ratchet, J. Fryxell 270,734 Seal lock, J. S. Roark
Injector, W. R. Park	Seeding machine, A. C. Evans
Insecticide, W. A. French	Sewing knit fabrics, machine for, W. Beattle 370,446 Sewing machine, J. Reece
Jar fastener, R. Bloeser 370,676	Sewing machine, book, Fifield & Jacobs 270,460
Jar fastener, T. B. Howe	Sewing machines, wax heater and thread waxer for, S. A. Allen
Journal box, F. H. Crafts	Shaft coupling, J. G. Shepard
Knife. See Leather cutting knife. Surgical	Sheet metal can and manufacturing the same, E. Norton
Knitting machines, cast off finger operating cam	Sheet metal corrugating machine, Caldwell &
for circular, W. D. Huse	Peterson
Ladle or dipper handle, L. E. Hurford 270,385 Lamp burner, Atwood & Lewis 270,516	Shovel. See Snow shovel. Siding and roofing, metallic sheeting for, L. L.
Lamp, electric, J. J. Skinner	Sagendorph 870,659
Lamp, electric arc, Thomson & Rice, Jr	Signaling apparatus, R. Quatermass
Latch, gate, W. H. Woodford	Soldering iron heater, W. Mellor
Leather cutting knife, H. Gould	Van Rysselberghe \$70,575 Spike, J. S. Pessenger 370,650
Liquid discharging apparatus, Lynch & Fitz-	Spirit and regenerating the purifying agent, ap-
gerald STO,700 Lock. See Alarm lock. Nut lock. Permutation	paratus for purifying crude, Bang & Ruffin 370,674 Spirit, purifying crude, Bang & Ruffin 370,675
lock. Seal lock. Locomotive smoke stack, Snyder & H :fty 270,746	Spoke socket, L. D. Warren 870,612 Spool guard, L. O. Smith 370,716
Lubricating loose pulleys, J. L. Bogert	Spring. See Door apring. Vehicle apring. Stalk or weed chopper, A. D. & B. F. Gilpin 370,616
Mandoline, manufacture of, G. B. Durkee 20,522 Measures, drainer for hquid, H. Panntill 270,648	Station indicator, J. W. Poet. 370,410 Steam boller, A. D. Brock. 370,721
Measuring vessel, metallic, Caldwell & Peterson 270,041	Steam engines, apparatus for stopping, O. Noll 278,614
Ment spreader, J. Foiger 1 270,616	Steam trap, S. Bobser

	-			1
		Stethoscope, H. P. Pratt	\$10,711	1
ig, Z. I		Contract of Street W. D. Bloomship.	- STOCKER	
	870,871	Group cleaning the envisees of E. McChrist	DI VLIBRE	1.
,	. 370,586	Corres I D Wallage	. 84U.981	
landlam.				
lection		I Grane stacker W. II Michmond	GIOLIGA.	1.
	. 870,028	Sunshade handle, E. Faasen	. 000,00	2.4
A Pos	. 370,485	Camping I mife I Kormann	310,100	1
			379,639	E
	. 870,629	Switch. See Railway switch.		1
w down E	310,421	Switch and signal, J. W. Handerson	370,620	1 =
r ror, r	mmy 400	Switch and signal apparatus, A. G. Ullimittich	DEDÉANO	1
diam'r.	. 370,497	Table W M Samorel	010/144	1
nding, J		Tag wiring machine, D. & C. A. Squier	370,425	
	. 870,656		370,636	
	. 370,466			ı
0 - 0 - 00 - 0 +	. 870,496	use in copying, A. C. Carey	370,653	1
	mm 400	Telegraph, printing, S. D. Field	379,691	1
	. 870,407	Telegraphs, repeater for harmonic, F. Van Ryssel-		
	370,636	herehe	370,576	
	. 370,617	berghe		
	. 370,588	berghe	370.577	
	. 370,457	Telephone, H. V. Hayes	379,477	1
	. 870,550	Thill coupling, J. W. Yous	37.0,587	
	. 370,515	Ticket case and diagram, combined, D. D. Grant.	859.535	
	. 370,657	Ticket case and diagram, combined, D. D. Grand.	Historian	1
	. \$70,646	Tie, See Bale tie. Railway cross tie.	970 200	1
	370,022			
	370,689	Tires in wheel rims, securing, T. B. Jeffery	970,780	
		Tobacco bag or wrapper, W. J. Cussen	\$30 £30	
	870,561	Torpedo, submarine, Sullivan & Etheridge	320,605	
	370,481	Towel arm, C. G. Udell	200 405	S
	370,488	Toy, A. E. Francis	W10/460	T
	. 370,379	Toy blow gun, E. I. Evatt	01U,002	
	370,360	Toy piatol, W. S. Crump	STEPUSES	1
	370,599	Track clearer, G. Nevens	870,555	
d, P. E		Trap. See Animal trap. Fish trap. Steam trap.		-
	370,735	Tree digger, nursery, D. Feigly	370,690	B
	370,438	Tubing catcher, F. Mixer	370,744	1
	870,568	Tubs, device for corrugating wash, Pelletier &		
		Kros	370,491	1
	870,678	Type writing machines, ribbon holding attach-		_
rning to		ment for W. W. Wilson	370,751	1
	370,750	Valve, piston, P. Armington	370,443	
	370,508	Valve, slide, T. T. Brown	870,725	
	870,652	Vapor and steam burner, S. T. McDougail	370,496	
	870,752	Vat covers, means for operating, P. P. Glor	370,694	
	370,595	Vault, bank, H. Gross	570,471	
	370,664	Vehicle, spring, C. Bensan	270,721	
		Vehicle spring, E. Cliff	370,610	
sterials	370,561	Vehicles, dress guard for, C. L. B. Martin	370,500	
	870,645	Ventilating heater, A. Weeks	370,560	
ustein.	920 449	Ventilation, system of, J. H. Lindsley	200,402	-
	870,482	Ventilator. See Car ventilator.		A
	370,514	Ventilator for buildings, I. Allegretti	200,500	17
	370,361	Violin case covers, apparatus for forming, G. B.	G10Ann	Ľ
Mar.		Durkee	270 721	_
ses. Fil-		Durkey D. D. Strake	270,427	1
		Wall coping, P. B. Wight	Ostolans.	a P
	370,567	warping machines, lease forming device for, w.	920 425	P
		F. West		Bi
	870,704	Washing machine, E. D. Hastings		W
	870,496	Washing machine, J. Schrib.	1770 584	P
	870,556	Washing machine, H. T. Wilson	970 492	-
		Water closet service box, D. Wellington		4
	370,666	Waterproofing compound, F. Kreutzer		и
	370,613	Wells, packer for gas or oil, I. N. Hoadley	PIOSIDE	1
	-	Wheel. See Fifth wheel. Railway wheel.	200 PSA	
p	370,709	Wheel, A. O. Sients	903,000	-
	310,614	Whiffletree coupling, W. F. Adams	DEMONS	91
.370,462,	370,463	Wire, apparatus for wiping metal coated, C. E.	200 510	
		Matteson		
	370,642	Wire rod reeling machine, F. H. Daniels		-
anism,		Wire stretcher, L. W. Lindley	070,681	F
		Wood wool, machine for making, R. Fleck	om/agg	-
		Wood working machines, tilting table for, B. G.	970,692	m
, W. F.		Luthor	-10/081	W
	570,584	Wrench. See Adjustable wrench. Pipe wrench.	990 FOR	be
Noyes.	370,430	Wrench, V. J. Van Horn See Schole	orning);	F
.870,505,		Yarn or thread, machine for inspecting, S. Schol-	990 510	-
	370,504	field		
	-	Yoke bar, neck, Stoner & Welch		
******		Yoke, neck, F. F. Wheeler	970 609	
	370,687	Zither, pedal, F. Wigand	atolings.	in
				-11
		Treatana		
e regu-		DESIGNS.		120
		Badge, J. B. Brilbeck	17,748	T
		Basque, lady's, J. Sheils		trat
		Carpet, J. L. Folsom		Pi
370,520,		Carpet, O. Heinigke		th
	370,487	Carpet, G. D. Tew		
		Ceiling decoration, M. Mellinger		
.870,521,		Costume, girl's, C. Sheils		
		Costume, Miss', M. Turner		•
	370,668	Cuspidor, W. T. Mersereau		
for the		Frieze decoration, M. Mellinger		
	870,472	Hood, M.A. Mets		-
				-
		Smoking set, M. Hecht		
	370,526	Smoking set, M. Hecht		
	370,526	Spoon, F. Schmidt	17,749	
pering,	370,526 370,560	Spoon, F. Schmidt	17,749 17,756	-
pering,	370,526 370,560 870,689	Spoon, F. Schmidt	17,749 17,756 17,744	T
pering,	370,526 370,560 870,689	Spoon, F. Schmidt. Spoon, forks, etc., handle for, H. A. Pistorius. Stove, cooking, Kahn & Thiem. Stove, heating, O. Germer.	17,749 17,756 17,744 17,740	T
pering,	370,526 370,560 870,689	Spoon, F. Schmidt. Spoon, forks, etc., handle for, H. A. Pistorius. Stove, cooking, Kahn & Thiem. Stove, heating, O. Germer. Vapor barner cap, C. A. Stockstrom.	17,749 17,756 17,744 17,740 17,752	Va (W
pering,	370,526 370,560 870,689 870,536	Spoon, F. Schmidt. Spoon, forks, etc., handle for, H. A. Pistorius. Stove, cooking, Kahn & Thiem. Stove, heating, O. Germer.	17,749 17,756 17,744 17,740 17,752 17,755	Twa

. 370,734	TRADE MARKS.
. 570,414	Barrels and their component parts, flour, Co-operative Barrel Manufacturing Company
. 370,611	Bitters, J. Smith & Son
. 370,446	Canned fish, Buchheit Packing Co 14,7
870,412	Cigars, Hansman & Hoffman
. 870,460	
	Flour, wheat, Carvill & Fail 44,7
F	Gunpowder, Schultze Gunpowder Company 14,7
. 370,440	Lime juice, Evans, Sons & Co 14,7
. 370,422	Medicine, A. B. Smith 14,7
. 870,416	Nuts, Bennett, Day & Co 14,7
	Remedies for diseases of the liver and lungs, ague
370,404	medicines, tonics, vermifuge, soothing drops,
4	and liniments, Dr. Harter Medicine Company 17,7
. 870,682	Soap and powder for sore and tender feet, F.
. 370,417	Round 14,7
	Toys and kindergarten materials, F. A. Richter 14,7
	Type writers, electrical, J. F. McLaughlin 14,7
. 820,659	Wines, W. T. Coleman & Co 14,7
. 270,558	Trimony or at consuming to Continuous states
. 370,377	
370,552	A printed copy of the specification and drawing

A printed copy of the specification and drawing of any patent in the foregoing list, also of any patent in saued since 1895, will be furnished from this office for 25 cents. In ordering please state the number and date of the patent desired, and result to Munn & Co., 361 Broadway, New York. We also furnish copies of patents granted prior to 1895; but at increased cost, as the specifications, not being printed, must be copied by hand.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the fore270,418 coing list, provided they are simple, at a cost of \$40
370,723 each. If complicated the cost will be a little more. For full instructions address Munn & Co., Sci Broadway.

New York. Other foreign patents may also be obtained.

Modvertisements.

Inside Page, each insertion - - - 75 cents a line. Back Page, each insertion - - - \$1.00 a line. The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may bead advertisement at the same rate per agate line, by measurement, as the letter press. Advertisements must be received a publication office as early as Thursday morning to appear in next issue.



SHIELDS & BROWN CO.

Sectional INSULATED AM

Steam, Gas and Water Pipes, Drums, Heaters, etc. The Best Non-Conductor of Meat & Cold in the World. Send for Illustrated descriptive Circular, and name big paper. 143 Worth Street. 78 and 80 Lake CHICAGO. 43 Worth Street, NEW YORK.

EXCELLENT BLACK COPIES of anything written or drawn with any Fon (or Type Writer) by the Fatent AUTOCOPYIST Lithography.

AUTOCOPYIST Co., 166 William Street, New York.



Lists aent. N.Y. Machinery Depot. Bridge Store No. 16. Frankfort Street, N. Y.

IMPROVEMENTS OF PRAIRIE ROADS and Streets. By T. J. Nicholl, C.E. Economical and Practical Suggestions, with six figures; on Wicth, Drainage, Ditching, Rolling Soils, Culverts, and Cost. How to Keep in Hepair. Laying out the Streets of a Town, with Cost, and Repairs needed, etc. Supplement 156. Price 10 cents.



AST AUTOMATIC CO., 2 New Chambers St., N. Y.

A Mechanical Engineer, with large experience in anchine designing and building, desires another engage-nent in machine abon, or in manufacturing business, to twee to improve machinery and processes. II, P. O. NOX 773, New York City.

FOR SALE, CHEAP, One Double Cylinder 15 H. P.

Otto Gas Engine n perfect order. Address, Winchester Repeating Arms Co., New Haven, Conn.

THE NEW TAY BRIDGE. ILLUS-ration of brief description of this recently finished tructure. Contained in SCIENTIFIC AMERICAN SOF-LEMBAY, No. 692. Price 10 cents each. To be had at his office, and from all newsdealers.



Woodworking Machinery. Chair, Furniture and Cabinet Mills. Pattern Makers' use etc.

Relistone Machine Co-

FITCHBURG, MASS. THEORY OF UNITS. BY G SZAR-wady—Measurement of a magnitude. Equations between concrete magnitudes. Absolute units. History of the C. G. S. system. Fundamental and derived units. Geometrical, Nechanical and Electric units. Criticism of the C. G. S. system. Contained in SCENTIFIC AMERICAN SUPPLEMENT, NO. 6468. Fire 10 cents. To be had at this office and from all newsdealers.

\$10.00 to \$50.00 per night. A fight and pro- gtable bustness. Magic Lanterns and Views of popular ub-jects. Catalogues on application. Part I Optical, 2 Mathematical, 5 Meteorological, 4 Magic Lanterns, etc. L., MANASSE, SS Madison Surect, Chicago, Ill.

AERIAL VORTICES.—AN ACCOUNT OF the experiments of Mr. chas. Weyber with a view to elucidating the question of the formation of waterspoots, whirly inds, and bail. Illustrated with § engarvings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 60-5. Price 10 cents. To be had at this office and from all newsdealers.



BARREL, KER, Hogshead, STAVE MACHINERY.

Over 50 varieties manufactured by
Trass Hoop Driving. E. & B. Holmes,

ASPHALTUM AND THE PITCH LAKE of Trinidad, By W. O. Crosby,—Origin of bitamens, Asphaltum, where found. The pitch lake of Trinidad. How the pitch is quarried, Origin of the lake, Contained in SCIENTIFIC AMERICAN SCIPPLEMENT, No. 605. Price 10 cents. To be had at this office and from all newsdealers.



SOME

CHOICE TECHNICAL BOOKS.

POWELL.—The Principles of Glass Making. Illustrated. 186 pages. 12mo.

1816 H AR Dis.—Alminium: Its History, Occarence, 1816 pages, 12mo.

1816 H AR Dis.—Alminium: Its History, Occarence, 1816 pages, 12mo, 1816 pages, 12mo, 1816 pages, 12mo, 1816 pages, 1816 pages, 1816 pages the Testing, Approaches, and the property of the Blower From the French by A. A. Fesquet. 30 ongravings 68 pages 870.

68 pages 870.

68 pages 870.

68 pages 870.

68 pages 1200.

68 pages 1

lection and ditted by Win. Crookes. Il engravings, 200 passes of the property ne French by A. A. French 1970.

Galvanoplastic Manipulations: A Practical of the Gold and Silver Electroplater, and the plastic Operator. Comprising the Section 1970.

Galvanoplastic Manipulations: A Practical of the Compression of all Metals by means of all Metals by means of the Section 1970.

Electric Machines. 650 pages, 800.

187.50

To The above or any of our Books sent by mail free of Poelase, at the publication prices, to any address in the

Our New and Revised Catalogue of Practical and tife Books, 80 pages, 800, and our other Catalogues and alire, the whole covering every branch of Science applied Arts, earl free and free of pactage to any one in any if the world who will furnish his address. HENRY CAREY BAIRD & CO.,

S10 Walnut St., Philadelphia, Pa., U. S. A.

THE BEST

INVESTMENT

for the Family, the School, or the Profes-sional or Public Library, is a copy of the latest issue of Webster's Unabridged.



esides many other valuable features, it contains

A Dictionary A Gazetteer of the World A Biographical Dictionary All in One Book.

3000 more Words and nearly 2000 more Illustrations than any other American Dictionary. Sold by all Booksellers. Pamphlet free.

G. & C. MERRIAM & CO., Pub'rs, Springfield, Mass.

HISTORY OF THE ELECTRICAL ART in the U.S. Patent office,—By C. J. Kintner. An interesting history of the growth of electrical science in this country, and notices of some of the more important models in possession of the Patent Office. Contained in SIEVIEFC AMERICAN SUPPLEMENT NO. 544. Price Beens. To be had at this office and from all news-dealers.

FOR SALE. Property in one of the finest sea-building 130x30 feet, two stories on street and three in rear, with a foundry building 60x100 feet, machine shop in basement, well equipped with tools, all modern, steam power with a never failing artesian well. Stuated and 30 feet in town, within 100 feet of railroad track and 30 feet in town, within 100 feet of railroad track ing and all the tools. A barrain to the right purchaser, as the business is well established, and all the facilities the best. Full description with particulars, price and terms furnished on application.

BELFAST MACHINE WORKS, BELFAST, ME.



COMPRESSION OF AIR.-DESCRIP-Of AIR.—DESCRIP-tion of Mass. Dubois & Francois' improved air com-pressing machine, devised for the use of the larger in-dustries and for mining purposes. With 8 flucrus; illus-trating the appearatus in plan, elevation and detail, contained in 8 IENTIFIC AMERICAN SUPPLEMENT, No. 433. Price 10 cenus. To be had at this office and from all newsdealers.

BABBIT and ANTI-FRICTION METALS

AS MANUFACTURED BY

E. A. C. DUPLAINE,

66 80. CANAL ST., CHICAGO, ILL.

Nickel Babbit (pat.) Warranted 15 per ct. Nickel.

Nickel Babbit (pat.) Warranted 15 per ct. Nickel.

Nickel & Copper Babbit Warranted 5 p.c. Nickel.

Genuine Cupper Babbit Warranted 5 p.c. Copper.

Genuine Cupper Babbit Warranted 5 p.c. Copper.

Genuine Cupper and Tin Bubbit.

Genuine "Babbit (Sold by others as real Genuine.)

ine), bircating Babbit (Absorbs the oil well), lamantine Babbit, very hard, journal polishes, urdware Babbit, a fine quality and good wearing, urdware Babbit, the ordinary cheap Babbit, tilmonial Lead Babbit.

No. 1 Plumbago Metal.

No. 2 Plumbago Metal.

No. 4 Plumbago Metal.

These Plumbago Metals cannot be excelled for the prices. They require but little oil at high speed, and I will deliver them in boxes of 65 or 125 lb., less Freight, Cartage, Boxing, &c. Try them, and convince yourself of their merits.

PERFECT

NEWSPAPER FILE

es, and painpriets, has need recless and Scientific American Superfor the low price of \$1.50 by mail
this paper. Heavy board sidTipic American," in giftties when the paper of the

MUNN & CO.,

RUBBER BELTING, PACKING, HOSE VULCANIZED RUBBER FABRICS

For Mechanical Purposes.

Air Brake Hose A Specialty. RUBBER MATS, RUBBER MATTING

AND STAIR TREADS. NEW YORK BELTING & PACKING CO., 15 PARK ROW, N. Y. JOHN H. CHEEVER, Treas.

Branches: Ev Lake St., Chicago: 36 Chestnut St., Phila. 52 Summer St., Boston.

J. D. CHEEVER, Dep'y Treas.

AGENTS: PERSICANER & CO., Pickhuben 5, Hamburgh.

ICE & REFRIGERATING Machines. York Pa-

NABBER



The Safe Fountain Pen will write fluently for one onth without refilling. (Guaranteed for one year.) Cheap, Useful, and Durable.

Former price, \$1.00; 50 cents complete. or 3 for \$1.00 comprising Pen, Filler, Cap, and a Case. A useful and valuable present. Sent free by mail. Agents wanted. SAFE FOUNTAIN PEN COMPANY,

WANTED-Agents to sell PRATT'S PATENT BUTTON FASTENER. Address PRATT MANUFACTURING CO., Boston, Mass.

1,000,000 ONE MILLION 1,000,000 The Draper Recording Thermometer.



This thermometer gives a permanent and continuous record in ink of the temperature. The chart indicating hours of the day and days of the week gives the degrees of temperature from 30 below zero to 110° above. All instruments are accurately adjusted and warranted. The record is easily read and absolutely correct. Sold by the leading instrument dealers and opticians throughout the United States and Canada, and by

FOR SALE. A patent, respectively the license for large extent in Germany, for Austria, France, Belgiur England, and America. Address offers to C 5517, car RUDOLF MOSSE, Cologne (Germany).

MUSICAL, OPTICAL, ELECTRIC, MECHANICAL WONDERS.

MAGIC LANTERNS AVIEWS

Free, S. H. BOUght,

COMPOUND ENGINES. F. ROCHOW, Sole Manufacturer, See BRIDGE STREET, BROCKLYN, N. Y.

NEW YORK.



37 Frankfort St.,


ROCK BREAKERS AND ORE CRUSHERS

the superintendence of Mr. Marsden, Mn. to, for the past twenty years, has been consected with the manufacture of Blake Crushers in this country and England.

FARREL FOUNDRY AND MACHINE CO., Manufra., Ansonia, Cons. COPELAND & BAUON, Agents, NEW YORK and PHILADELPHIA.

SCIENTIFIC AMERICAN SUPPLE-MENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newedealers in all parts of

GRAND GIFT To introduce our wondering Machine we will GIVE ONE way in evertown. Best in the World. No labor or rubbing
SEND FOR ONE to the
National Co., 23 Dey St., N. Y.



ORNAMENTAL DESIGN, PRINCI ples and practice of.—By Lewis F. Day. The second of a series of lectures on this subject discussing the lines upon which ornament can be distributed. With 5 illustrations. Contained in SCHENTIPIC AMERICAN SUPPLEMENT, No. 589. Price 10 cents. To be had at this office and from all newsdealers.



\$7.50

Stationary Engines
with Plain and Astomatic Cut-off. Vertical and
Horizontal.
Penna. Diamond Drill Co.,
Birdsboro, Pa.

CARBOLIC ACID.—AN INTERESTING CARBOLIC ACID.—ARTINI ERESTING paper by Frank French, M.D., treating of the history of carbolic acid, the mode of manufacturing it, and its uses as a therapeutic agent, ansathetic and dentifrice, its effect upon animal organisms, and the antidotes for it in effect upon animal organisms, and the antidotes for it. In cases of polsoning. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent SUPPLEMENT, No. 4.38. Price III cents. To be had at free of charge to any address.

MUNN & CO... 361 Broadway, N. Y.

HOUSE BUILT FREE FOR EVERY

CAPILLARY TUBES, SPONTANEOUS Motion in.—A paper by C. Decharms upon the applica-tion of electricity to the study of the apontaneous as-censional motion of liquids in capillary tubes—the question being studied from a dynamic standpoint. With Bi engravings of apparatus and details. Contain-ed in SCIENTIFIC AMERICAN SUPPLEMENT, No. 338. Price 10 cents. To be had at this office and from all newsdealers.



New Catalogue of Valuable Papers

StemWind ROCKFORD Movement 3 oz. Duber Solid Silverine Case A Guarantee from the Rockford Watch Co. for the Movement, A Guarantee from the Duber Watch Case Oo. for the Case, and A Guarantee from the Old and Well Established House of W. HILL & CO. for both.

A STEM WINDER AND STEM SETTER ONLY \$7.50. A 90 DAY OFFER ONLY.

Proposals for three Overhead Travelling Cranes complete, three Supports for such Cranes, and one Iron Frence for a fielding.

Sealed proposals will be received at the Nary Department, Washington, D. C., until 13 o'clock noon, on Thursday, the lish day of September, 187, at which time and place they will be opened in the presence of bidders, for furnishing the necessary material and labor and constructing, delivering and erecting the iron work for the supports of three overhead travelling cranes, the frame of one building, and three overhead travelling cranes complete, including attachments pertaining thereto, for the Ordnance Gun-shops at the Navy Yard, Washington, D. C., in accordance with plans which may be seen, and specifications, copies of which, together with all other information essential to bidders, may be obtained at the information essential to bidders, may be obtained at the information essential to bidders, may be obtained at the remained on application to that office.

Proposals must be made in accordance with former, che will also be furnished on application to that office.

Proposals must be made in duplicate and enclosed in envelopes marked "Proposals for Overhead Travelling Cranes complete, for Iron Supports for such Cranes, and Iron Frame for a Building," and addressed to the Secretary of the Navy, Navy Department, Washington, D. C. The Secretary of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject any of the Navy reserves the right to reject the Government may require.

William C. WHITNEY,

Services of the Navy.

NAVY DEPARTMENT.

WASHINGTON, Seytember 12, 1897.

The time for receiving proposals under the foregoing advertisement is hereby extended until Tuesday, the lat day of November, 1897, at 13 o'clock noon, at which time the bids will be opened.



THE GREAT TOWER AT PARIS.

Description, by Mr. Eiffel, of the mode of construction of the foundations of the great led foot tower. With two lilustrations showing sections of the calesons. Contained in Scientific American Sciptimans, N. 607. Price 10 cents. To be had at this office and from all newsdealers.

SCIENTIFIC BOOK CATALOGUE,

Our new catalogue containing over 100 pages, includ-ng works on more than fifty different subjects. Will be nailed free to any address on application.

MUNN & CO., Publishers Scientific American, 361 Broadway, New York.

TECHNICAL TRAINING CONSIDERED as a part of a "Complete and Generous Education." An address by Dr. R H. Thurston, elivered at the seventeenth snual commencement of the Worsester Poytechnic Institute. Contained in SCHENTIFIC AMERICAN SUPPLEMENT, No. 602. Frice 10 cents. To be had at this office and from all newsdealers.

IMPORTANT PATENT DECISION ON SIGHTFEED LUBRICATORS.

Judge Colt, of the United States Circuit Court, District f Massachusetts, decided September 3th in the cases frought by the Seibert Cylinder Oil Cup Company against Lunkenheimer, on the Gates patent, that the patent was valid.

brought by the cases. Lunkenhelmer, on the Gates patent, that the patent was valid.

The Gates patent is for the method of lubricating the cylinders and interior working parts of steam engines, showing the drops of oil passing up through wafer or other liquids enclosed by a transparent chamber, being that form of sightfeed lubricator known as the "Upfeed."

This decision is of great importance, as it covers a very large part of all sightfeed lubricators now made and sold, and will be regarded with interest by all manufacturers of those articles, as well as railroads and other users.

The Seibert Cylinder Oil Cup Co., 92 and 94 Liberty Street, NEW YORK.

THE NEW CROTON AQUEDUCT.—
Detailed description of the great aqueduct now being constructed to increase the water supply of New York City and also of the great dam which it is proposed to build across the Croton Raiver, at Quaker Bridge. With congravings the Bridge Control of the Critical Bridge with the Control of the Critical Bridge with the Control of the Critical Bridge Control of the Critical Bri

OTTO CAS ENGINES.

Over 20,000 Sold.

Horizontal Otto. Gas Engines.
Vertical. Otto. Gas Engines.
Twin Cylinder. Otto. Gas Engines.
Combined. Otto. Gas Engines and Pumps.
Combined. Otto. Gas Engines and Dynamos. OTTO GAS ENGINE WORK >. PHILADELPHIA.

New York Agency, 18 Vesey Street.

A SYNOPSIS OF ALL THE KNOWN Answitchelos, with their physical and physic ogical properties, and answitchele value. By B. W. Richardson, M.D. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 513 and 516. Frices Decents each. To be had at this office and from all newsdenliers.

To Business Men.

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newapaper. He wants circulation. This he has when he advertises in the SCIENTIFI AMERICAN. When selecting a list of publications in wasca you occure it is for your interest to advertise. This is frequently done, for the reason tout the agreet gots a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.

For rates see toy of first column of this page, or address MUNN & CO., Publishers,

MUNN & CO., Publishers,

CATARRH positively cured by the great German Remedy. Sample pkge. and book for deta instamps. E. H. MEDICAL CO., East Hampton, Conn.

CONSUMPTION, throatend bronchles directions for home treatment. Give express office. DR. WM. F. G. NOETLING & Co., East Hampton, Conn.


CURE FOR DEAF

ELECTRICAL Edward P. Thompson, Solicitor Street, N. Y. Write for testimonials and instructions

Modvertisements.

Inside Page, each insertion - - - 75 cents a line. Black Page, each insertion - - - \$1.00 a line.

The above are charges per agrale line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.



THE COPYING PAD .- HOW TO MAKE

USEFUL BOOKS.

Manufacturero, Agriculturista, Chemiata, Engineera, Mo anufacturers, Agriculturists, Chemists, Engineers, Mechanics, Builders, men of leisure, and professional men, of all classes, need good books in the line of their respective callings. Our post office department permits the transmission of books through the malls at very small cost. A comprehensive catalogue of useful books by different authors, on more than fifty different subjects, has just been published for free circulation at the office of this paper. Subjects classified with names of author. Persons desiring a copy, have only to ask for it, and it will be mailed to them. Address,

MUNN & CO., 361 Breadway, New York.

Steam! Steam!

We build Automatic Engines from 2 to 200 H. P., equal to anything in market.

A Large Lot of 2, 3 and 4-H. Engines With or without boilers, low for cash B. W. PAYNE & SONS,

Box 15,

Elmira, N. Y.

ALCOHOL. SWEET POTATO. — AN account of a new industry recently established at the Asserse—that of the distillation of alcohol from raw assest point-eas. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 372. Price is cents. To be had at this office and from all newscalesters.



ELECTRIC CONVEYORS.-DESCRIPtion of two ingenious systems for the electric carriage of small packages. Illustrated with 13 engravings. Con-484. Price 16 cents. To be had at this office and from all newschales.

VOLNEY W. MASON & CO., FRICTION PULLEYS CLUTCHES and ELEVATORS PROVIDENCE, R. L.

THE GREAT AQUEDUCT OF NEW City.—Leagthy and very complete account of the sequeduct new being built by the city of New York, crease its water supply. With congravings. Concide the SCHENTIFIC AMERICAN SUPPLEMENT, No. and \$60. Price 10 cente each. To be had at this a and from all newscealers.

STEAN PUMPS for Hot or Cold, Fresh or Salt Water; for Oils, Naphtha, Tar; fer Case Juice, Liquors, Syrups, Scum; for Ammonia, Alhalies, Extracts, Acides; for Thick, Volatile, Viacuum Pumpa of the highest efficiency. Pilter Press Pumpa. Air, Gas and Acid Blowers. Air Compressors. Etc. and Acid Blowers. Air Compressors. Etc. BUILT BY GUILD & GARRISON, Breeklys, N. Y.





PATENTS

MESSRS, MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to exmine improvements, and to act as Solicitors of Patents

cation of the Scientific Amana.

anine improvements, and to act as Solicitors of Paterns for Inventors.

In this line of bourses they have had forty-one years apperents, and now have unequaled facilities for the preparation of Patents in the United States, Canada, and Foreign Countries. Mesers Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissee, Assumments, and Repurts for Books, Labels, Reissee, Assumments, and Repurts for intrinsiements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms.

We also send. Free of charge, a Synopsus of Foreign Pa-tent Laws, showing the cost and method of securing patents in all the principal countries of the world. MUNN & CO., Solictions of Patents, 201 Broadway, New York.

BEANCH OFFICES.-No. 62 and 68 F Screet, Pa- Shafting and Gearing, Textile Machinery, 224 and Wood Star., Blanch Offices.-No. 62 and 68 F Screet, Pa- Shafting and Gearing, Textile Machinery, Palladelphia, Pa- Philadelphia, Pa- Ph

HAN OUTINS FAMILY ASBESTOS ROOFING

Tor the past twenty-sever as and is now in use upon roofs of Dry-Kilns, Lumber Sheds, F. Foundries, Cotton Gins, Chemical Works, Railroad Bridges, Co. about Decks, etc., in all parts of the Supplied rest.

Supplied ready for use, with Asbestos Roof Coati
Is adapted for all cli
workmen. Samples and scriptive Price List free by mail.

H. W. JOHNS MANUFACTURING CO.,

H. W. Johns' Fire-Proof Paints, Liquid Paints, Fire and Water-Proof stos Sheathing, Building Felt, Asbestos Steam Fackings, Boiler Coverings, etc.


VULCABESTON, Moulded Piston-Bod Packing Rings, Gankets, Sheet Packing, etc. Established 1858- 87 MAIDEN LANE, NEW YORK, SHIGASG, LINGON, CONTROL OF THE PROPERTY OF THE PROPER

LABOID GLUE RUSSIA CEMENT CO., Sample by mail and sample

LEO XIII. BIOGRAPHICAL SKETCH of the reigning pope. With portrait. Contained in SCI-KNTIFIC AMERICAN SUPPLEMENT, NO. 6604. Price 10 cents. To be had at this office and from all newsdealers



HENDON SEWAGE WORKS. DESCRIPtion of a new plant for the treatment of sewage by fil tration, and precipitation of the organic matters by lime. With 3 illustrations. Contained in SCIENTIFE AMBIRICAN SUPPLEMENT. No. 55-2. Price in outs To be had at this office and from all inguedenlers.





JACKET KETTLES Plain or Forcelain Lined. Tested to 100 1 pressure. Send for Lists. HAND, BURR & CO., 614 and 616 Market St., Philadelphia. Pa.



GAS ENGINEERING, RECENT PROgress in.—By A. Macpherson. Begenerative system of retort firing. Improvements in ms. purification. Burnors and regenerative imps. The We shade gas light, Parallin as a rival of coal gas, oil in gas making. Prices of residual products. Contained in Scinving Australia Australia and Scinving Australia Australi






BEST and most RELI-ABLE for swift running. Chas. A. Schieren & Co. 47 Ferry St. New York. 416 Arch St., Phila. 66 Federal St., Boston.

COVERINGS

Absolutely Fire Proof. BRAIDED PACKING, MILL BOARD, SHEATHING, CEMENT, FIBRE AND SPECIALTIES.

OMALIMBERS—SPENCE CO., FOOT B. STM ST., N. Y.

BRANCHES: Phila, 34 S. 2d St. Chicago, 144-146 E. Lake St. Pittsburg, 37 Lewis Block.

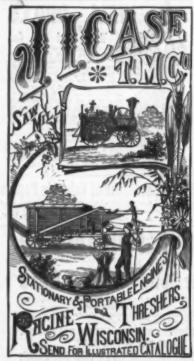

SEVERN AND MERSEY TUNNELS. description of these two important engineering ks, with two engravings. Contained in SCIENTIFIC SHICAN SUPPLEMENT, No. 604. Price 10 cents. To and at this office and from all newsdealers.

DYNAMO - ELECTRIC MACHINES.—A study of the leading types of these apparatus. Illustrated with 18 engravings. Contained in SCIENTIFIC and describing the method of treating wood by the ambiguity of the leading types of these apparatus. To be 18th at this office and from all newdetalers. To be 18th at this office and from all newdetalers. PRESERVATION OF RAILWAY TRES and Timber by the use of Antiseptics. A paper by J. P. Card describing the method of treating wood by the Card describing the method of treating wood by the first state of the results of



GOLD MEDAL, PARIS, 1878. BAKER'S Breakfast Cocoa.

Warranted absolutely pure Cocos, from which the excess of Oil has been removed. It has three times the strength of Cocoa mixed with Starch, Arrowroot or Sugar, and is therefore far more economical, costing less then one cent a cup. It is delicious, nourishing, strengthening, easily digested, and admirably adapted for invalids as well as for persons in health.

Sold by Grocers everywhere

W. BAKER & CO., Dorchester, Mass.

GOVERNMENT BREEDING FARM FOR Cavalry Horses. A paper by Lieut. S. C. Robertson. U. S. A., outlining a plan for the establishment of a breeding farm for borses maintained and controlled by the government, and discussing the commonic features of the schemes. Contained in Scienzific Assentian Section 2018. To be had at this office and from all newsdealurs.



Barnes' Foot-Power Machinery. Complete outsits for Actual Workshop Business. Read what a customer says:
"Considering its capacity and the accurateness of your No. 4 Lathe. I do not see how it can be produced at such low cost. The velocipede foot-power is simply elegant. I can turn steadily for a whole day and at night feel as little tired as if I had been walking around." Descriptive Catalogue and

TANNIN. ITS PRESENT AND FUTURE Sources. A lecture by Prof. Heary Trimble, giving very comprehensive treatment of the subject. Of tailoud in SCIENTIFIC AMERICAN SUPPLANTATION. Of Price 10 cents. To be had at this office and from newsdenions.



The Original Unvolcanized Packing

CALLED THE STANDARD—As it is the Packing by which all others are compared.

Accept no packing as JENKINS PACKING unless stamped with our "Trade Mark."

JENKINS BROS, Standard Street, N. Y. 100 Milk street, N. Y. 100 Milk street, N. T. 100 Milk street,

ELEVATORS, ETC.

95 MILK ST. BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

TUNNEL FOR FOOT PASSENGERS IN Stockholm.—Description of a in which the freezing metho With 7 figures. Contained



Scientific American

FOR 1887. The Most Popular Scientific Paper in the World, Only \$3.00 a Year, including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weakly. Every number contains six-teen pages of useful information and a large number of original engravings of new inventions and discoveries.

original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. All Classes of Readers and in the SCIENTIFIC AMERICAN a popular re-use of the best scientific information of the day; and it is the aim of the publishers to present it in an attractive-forms, avoiding as much as possible abstrase torms. To every intelligent mind, this journal affords a constant supply of instructive reading. It is promotive of knowledge and progress in every community where it circulates.

Terms of Subscription.—One copy of the SCIENTERMS

Terms of Subscription.—One copy of the SCIEN-TIFIC AMERICAN will be sent for one year—32 numbers—

postage prepaid, to any subscriber in the United States or Canada, on receipt of three delines by the publishers; six months, \$1.50; three months, \$1.50; Clabs.—One extra copy of the SCENNIPIC ARESTCAN will be supplied gratin for every club of five subscribers at \$3.00 each; additional copies at same proportionate

The safest way to remit is by Postal Order. Draft, or Express Money Order. Monny carefully placed inside of envelopes, securely scaled, and correctly addressed, seldom goes astray, but is at the sender's risk. Ad-dress all letters and make all orders, drafts, etc., pay-

MUNN & CO., 361 Broadway, New York. THE

Scientific American Supplement.

This is a separate and distinct publication from THE SCHENTIFIC AMERICAN, but is uniform therewith in size, every number containing aixteen large pages. THE SCHENTIFIC AMERICAN SUPPLEMENT is published week'y, and includes a very wide range of contents. It weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the prin apal departments of Science and this Useful Arts, embracing Biology, Geology, Mineralosy Natural History, Geography, Archwology Astronomy, Chomistry, Electricity, Light. Heat, Mechanical Engineering, Steam and Bailway Engineering, Mining. Ship Building, Marine Engineering, Photography, Lechnology, Manufacturing Industries, Satitary Engineering. Agriculture, Horticulture, Domiratic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information pertaining to these and allied subjects is given, the whole profusely illustrated with enggavings. engiavings.

The most important Busineering Works, Mechanisms and Manufactures at home and ab-

and manufactures at nome and abroad are represented and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, \$5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for \$7.00. Address and remit by postal order, express money order, or check,

MUNN & Co., 361 Brondway, N. Y., Publishers Scientific American.

To Foreign Subscribers,-Under the facilities of the Postal Union, the SCIENTIFIC AMERICAN to now sent by post direct from New York, with regularity, to sub-scribers in Great Britain India, Australia, and all other British colonies; to France, Austria, Belgium, Germany, Hussia, and all other European States; Japan. Brail, Maxico, and all States of Central and South America. Terms, when sent to foreign countries, Canada excepted, 34, gold, for Scientific America. An one year; 38, gold for both Scientific America and Supriment for one year. This includes postage, which we pay. Remit he nostal or express money order, or draft to order of one year. This includes postage, whom we have no control of express money order, or draft to order of MUNN & CO... 361 Broadway, New York.

PRINTING INKS.

THE "Scientific American" is printed with CHAS.

RNEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.